








# Omega Pro 2

92915753 OP2 3800-927-65 CKIT+ MPT BC Q600

THORN

IEC EN 60598-1 RG 0			IK03					650°C		T <sub>a</sub> 0 +35
---------------------------	---	---	------	---	---	---	---	-------	---	-------------------------

## Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.  
LED driver, Wireless controlled via App with Bluetooth® 4.  
x - basicDIM Wireless. Class II electrical (this product is not earthed), IP40\_IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate microprismatic optic for maximised spacing with central control pod hole. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with VCT technology (variable colour temperature), stepless tunable from 2700-6500K, DT8., Colour Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 57 mm  
Luminaire input power: 39.8 W  
Luminaire luminous flux: 3800 lm  
Luminaire efficacy: 95 lm/W  
Weight: 5.44 kg



TLG\_OMP2\_F\_QMPTKIT\_PDB.jpg

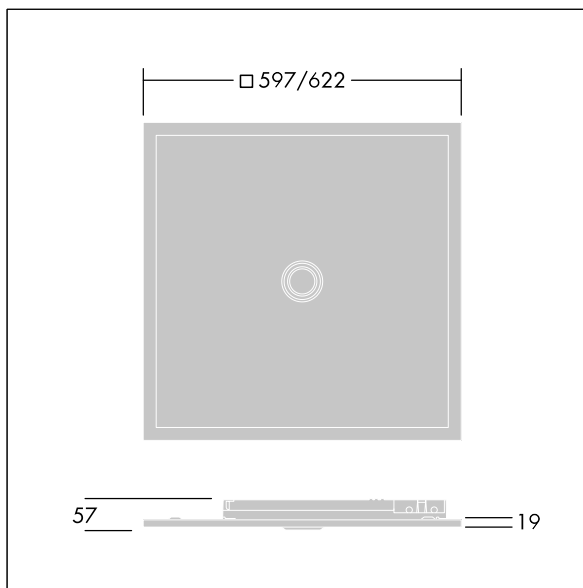

TLG\_OMP2\_M\_QKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## **Omega Pro 2**

**92915753 OP2 3800-927-65 CKIT+ MPT BC Q600**

THORN