

Omega Pro 2

92916293 OP2 3000-840 CKIT+ MPT BC PIR Q600

THORN


IEC EN 60598-1 RG 0			IK03					650°C	T _a 0 +35	
---------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	-------------------------	--

Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire. LED driver, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless. Class II electrical (this product is not earthed), IP40_IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate microprismatic optic for maximised spacing with central control pod hole. Equipped with presence detector and daylight harvesting function for dimming control plus slaves via bluetooth. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 57 mm
Luminaire input power: 23.7 W
Luminaire luminous flux: 3000 lm
Luminaire efficacy: 127 lm/W
Weight: 5.52 kg

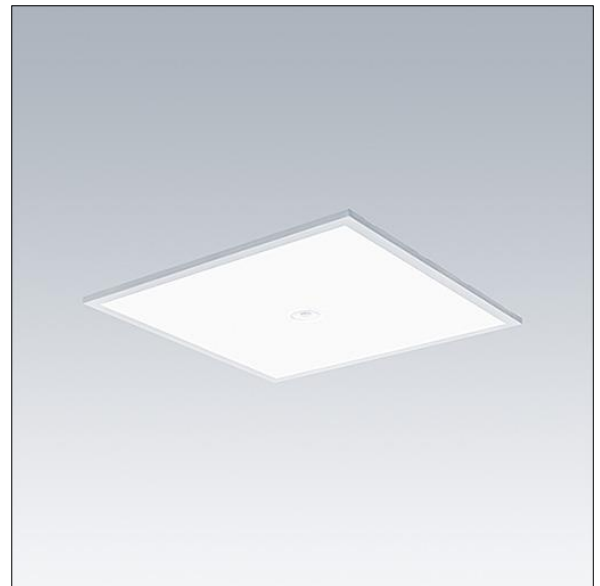

TLG_OMP2_F_QMPTPIR_PDB.jpg

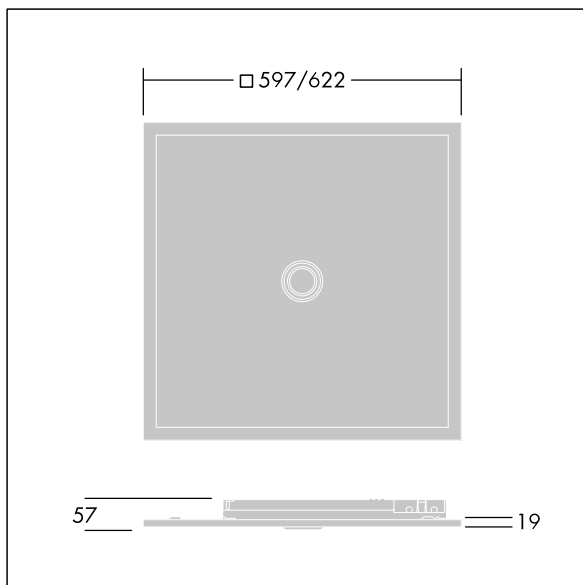

TLG_OMP2_M_QKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92916293 OP2 3000-840 CKIT+ MPT BC PIR Q600

THORN