

Contrast

96633452 CONT3 12L70 RGBW WB BC 6K ANT

THORN

ISO 9223	IP66	IK08		CE			T _a -20 +25
C5							

Contrast


A medium architectural Bracket mounted LED floodlight with 12 LEDs driven at 700mA and a wide beam distribution. LED driver, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless. Class II electrical (this product is not earthed), IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Equipped with 10kV / 10kA surge protection device. Complete with RGBW LEDs (White = 830)

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm

Dimensions: Ø239 x 156 mm
Luminaire input power: 32 W
Luminaire luminous flux: 1316 lm
Luminaire efficacy: 41 lm/W
Weight: 6 kg



TLG_CON3_F_S_12L.jpg

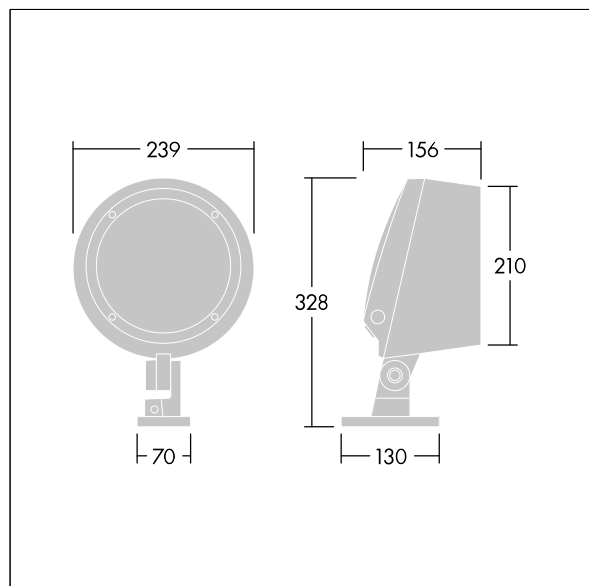

TLG_CONL_M_12L.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Contrast

96633452 CONT3 12L70 RGBW WB BC 6K ANT

THORN