

# Contrast

THORN

96633454 CONT3 36L105-827 MB SWD 6K ANT

|          |      |      |  |    |  |  |                           |
|----------|------|------|--|----|--|--|---------------------------|
| ISO 9223 | IP66 | IK08 |  | CE |  |  | T <sub>a</sub> -20<br>+35 |
| C5       |      |      |  |    |  |  |                           |


## Contrast

A large architectural Bracket mounted LED floodlight with 36 LEDs driven at 1050mA and a medium beam distribution. LED driver, SwitchDim dimmable. Class II electrical (this product is not earthed), IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Equipped with 6kV surge protection device. Complete with 2700K LED

Dimensions: Ø397 x 206 mm  
Luminaire input power: 117 W  
Luminaire luminous flux: 9022 lm  
Luminaire efficacy: 77 lm/W  
Weight: 13.1 kg



TLG\_CON3\_F\_M\_36L.jpg

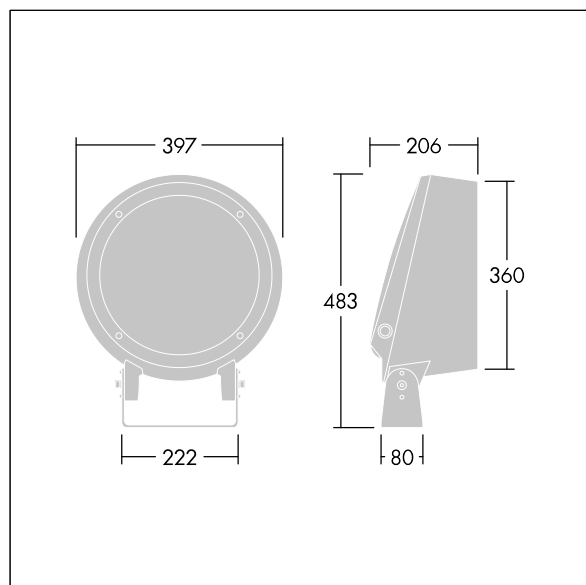

TLG\_CONL\_M\_36-52L.wmf

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting