

|                |                          |  |      |      |  |    |  |  |                   |  |
|----------------|--------------------------|--|------|------|--|----|--|--|-------------------|--|
| ISO 9223<br>C3 | ida<br>DARK SKY APPROVED |  | IP66 | IK09 |  | CE |  |  | T <sub>a</sub> 35 |  |
|----------------|--------------------------|--|------|------|--|----|--|--|-------------------|--|

### Urba Deco


A smart, sophisticated architectural urban lantern with 48 LEDs driven at 500mA and a Wide Street Comfort (symmetrical) optic with no upward light. Electronic, fixed output control gear. Class I electrical, IP66, Impact strength: IK09. Canopy and base: die-cast aluminium (AS9U3, LM24 equivalent, EN AC-46000) textured black (close to RAL9005). Enclosure: 6mm thick clear glass. Pre-wired with 1m cable. Suspended through 34G, luminaire perpendicular to the road. Complete with 3000K LED.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 510 x 241 x 146 mm  
 Luminaire input power: 69.8 W  
 Luminaire luminous flux: 10642 lm  
 Luminaire efficacy: 152 lm/W  
 Weight: 6.53 kg  
 Scx: 0.031 m<sup>2</sup>



TLG\_URBD\_F\_MSUPDB.jpg

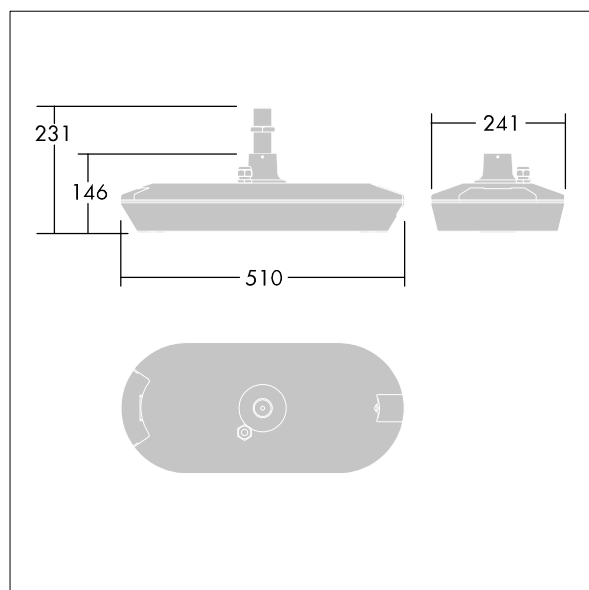

TLG\_URBD\_M\_MUS.wmf