

| | | | | | | | | | | | |
|----------------|--------------------------|--|------|------|--|----|--|--|--|-------------------|--|
| ISO 9223 C3 | ida DARK SKY APPROVED | | IP66 | IK10 | | CE | | | | T _a 35 | |
|----------------|--------------------------|--|------|------|--|----|--|--|--|-------------------|--|

Urba Deco

A smart, sophisticated architectural urban lantern with 24 LEDs driven at 500mA and a Wide Street Comfort (symmetrical) optic with no upward light. Electronic, fixed output control gear. Class I electrical, IP66, Impact strength: IK10. Canopy and base: die-cast aluminium (AS9U3, LM24 equivalent, EN AC-46000) textured black (close to RAL9005). Enclosure: 6mm thick clear glass. Pre-wired with 1m cable. Catenary mounted through 34G, luminaire perpendicular to the road. Complete with 3000K LED.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 510 x 241 x 266 mm

Luminaire input power: 37 W

Luminaire luminous flux: 5066 lm


Luminaire efficacy: 137 lm/W

Weight: 7.12 kg

Scx: 0.031 m²



TLG_URBD_F_MCA.jpg

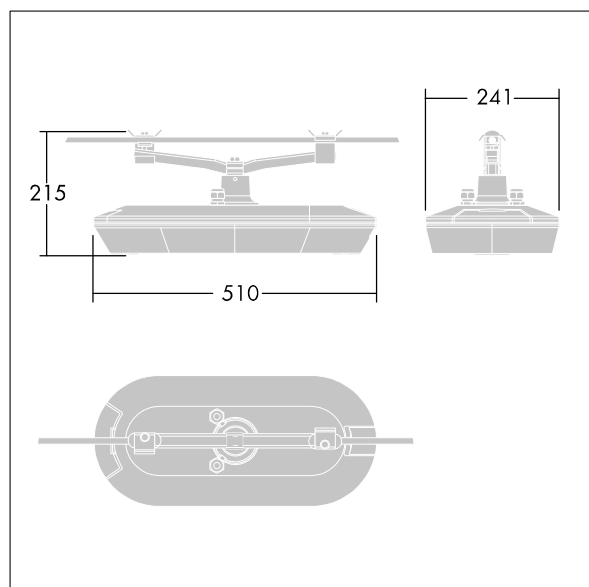

TLG_URBD_M_CATENARY.wmf