

Olsys Street

96633550 OLSYS2 36L70 730 CL1 BP8 STR

ISO 9223 C3		IP66 IK08			T _a 50
----------------	--	-----------	--	--	-------------------

Olsys Street

An LED street lantern with street distribution for urban street lighting applications. Electronic, bi-power control gear. Class I electrical, IP66, IK08. Body: die-cast aluminium (AS9U), powder coated silver-grey (RAL 9006). Enclosure: tempered glass. Optics: aluminium. Supplied in one box, ready to install. Mounting attachments to be ordered separately. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Complete with 3000K LED

ambient temperature: -30°C to +50°C

Dimensions: 655 x 337 x 76 mm


Luminaire input power: 78.5 W

Weight: 8.75 kg

Scx: 0.17 m²



TLG_OSYS_F_1MPTPDB.jpg

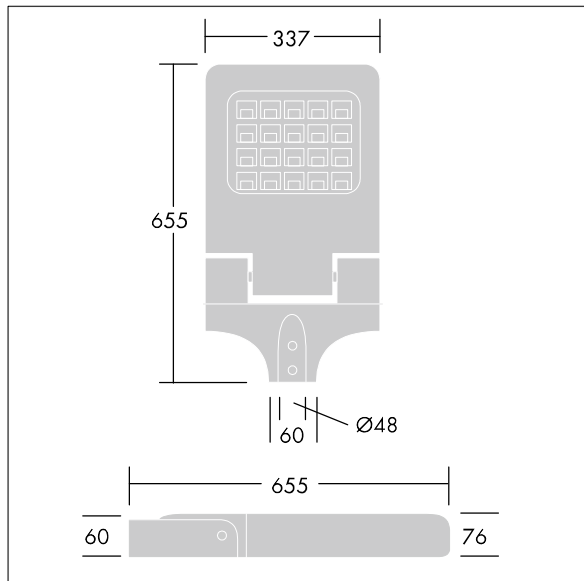

TLG_OSYS_M_STR2.wmf

This product contains a light source of energy efficiency class D.

Olsys Street

96633550 OLSYS2 36L70 730 CL1 BP8 STR

THORN