

# Omega Pro 2

92916991 OP2 3800-840 CKIT+ HX BC PIR Q600

THORN


|                           |                                                                                   |                                                                                   |      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |       |                         |
|---------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------|-------------------------|
| IEC EN<br>60598-1<br>RG 0 |  |  | IK03 |  |  |  |  | 650°C | T <sub>a</sub> 0<br>+35 |
|---------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------|-------------------------|

## Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire. LED driver, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless. Class II electrical (this product is not earthed), IP40\_IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate hexagonal comfort optic with central control pod hole. Equipped with presence detector and daylight harvesting function for dimming control plus slaves via bluetooth. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 57 mm  
Luminaire input power: 27.4 W  
Luminaire luminous flux: 3800 lm  
Luminaire efficacy: 139 lm/W  
Weight: 5.52 kg

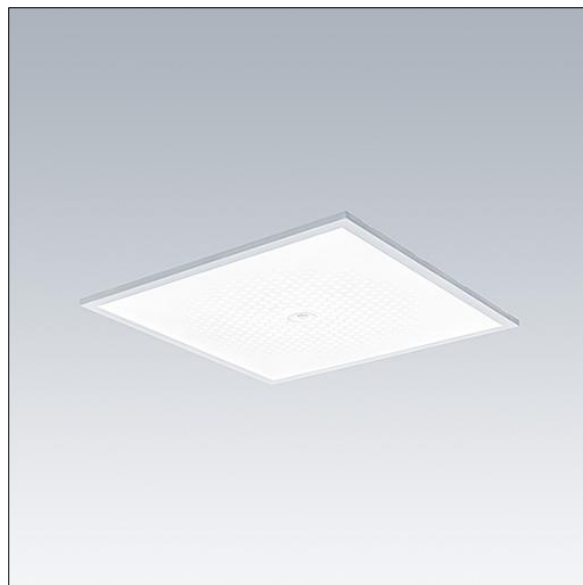

TLG\_OMP2\_F\_QHPIR\_PDB.jpg

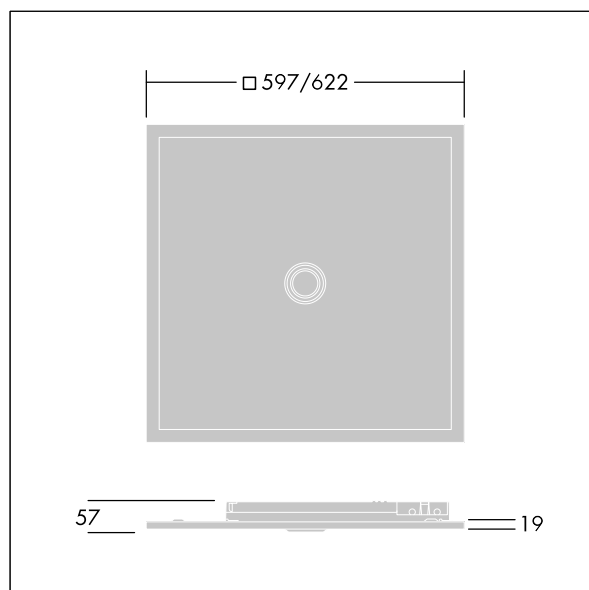

TLG\_OMP2\_M\_QKIT.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Omega Pro 2

92916991 OP2 3800-840 CKIT+ HX BC PIR Q600

THORN