

Omega Pro 2

92916883 OP2 4400-965 CKIT HX BC Q600

THORN


| | | | | | | | | | | |
|---------------------------|---|---|------|---|---|---|---|-------|-------------------------|--|
| IEC EN 60598-1 RG 0 |  |  | IK03 |  |  |  |  | 650°C | T _a 0 +35 | |
|---------------------------|---|---|------|---|---|---|---|-------|-------------------------|--|

Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire.
LED driver, Wireless controlled via App with Bluetooth® 4.
x - basicDIM Wireless. Class II electrical (this product is not
earthed), IP40_IP20, Impact strength: IK03. Body: steel
sheet, finished white (close to RAL9016). Diffuser: UV-
stabilised polycarbonate hexagonal comfort optic.
Electrical connection via 7 pole piano key terminals, loop-
in/loop-out possible. Complete with 6500K LED, Colour
Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 55 mm
Luminaire input power: 43 W
Luminaire luminous flux: 4450 lm
Luminaire efficacy: 103 lm/W
Weight: 5.44 kg

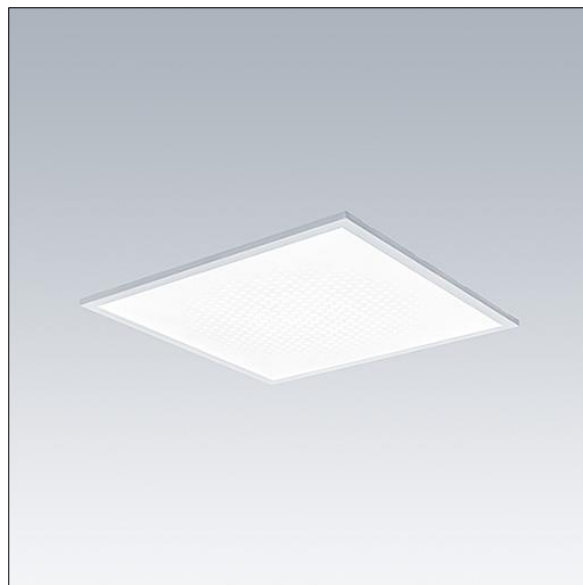

TLG_OMP2_F_QH_PDB.jpg

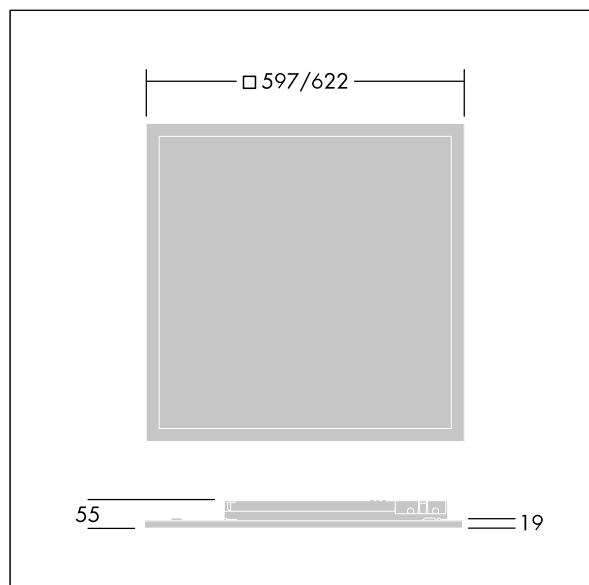

TLG_OMP2_M_Q.wmf

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro 2

92916883 OP2 4400-965 CKIT HX BC Q600

THORN