

# Omega Pro 2

92917606 OP2 3000-840 CKIT+ OP BC PIR 3X12

THORN


IEC EN 60598-1 RG 0				IK03					650°C	T <sub>a</sub> 0 +35	
---------------------------	--	--	--	------	--	--	--	--	-------	-------------------------	--

## Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire. LED driver, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless. Class II electrical (this product is not earthed), IP40\_IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polymethylmethacrylate opal optic for wide light distribution with central control pod hole. Equipped with presence detector and daylight harvesting function for dimming control plus slaves via bluetooth. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 1197 x 297 x 59 mm  
Luminaire input power: 23.7 W  
Luminaire luminous flux: 2850 lm  
Luminaire efficacy: 120 lm/W  
Weight: 5.75 kg

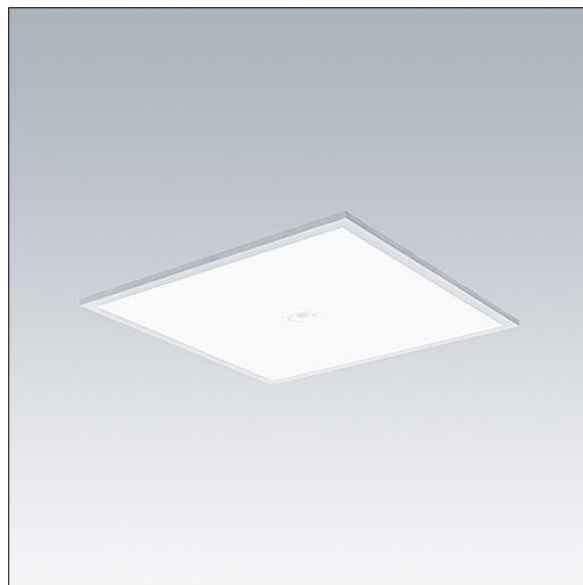

TLG\_OMP2\_F\_QOPIR\_PDB.jpg

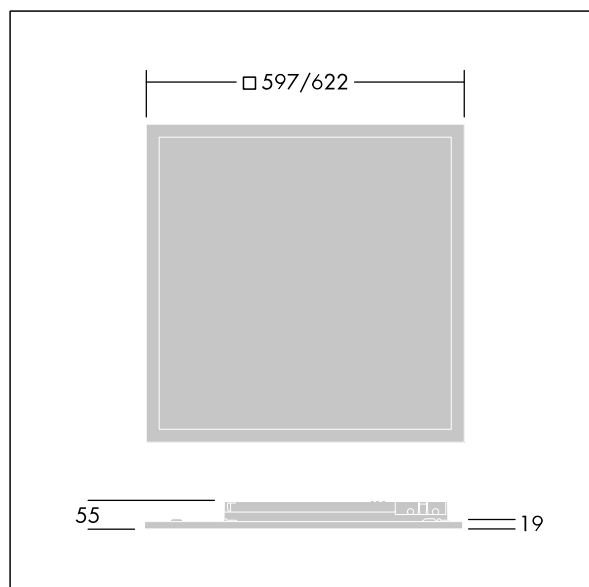

TLG\_OMP2\_M\_Q.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## Omega Pro 2

92917606 OP2 3000-840 CKIT+ OP BC PIR 3X12

THORN