

## Omega Pro 2

92917584 OP2 4400-940 CKIT HX BC Q600

|                           |  |  |  |      |  |  |  |  |       |                         |
|---------------------------|--|--|--|------|--|--|--|--|-------|-------------------------|
| IEC EN<br>60598-1<br>RG 0 |  |  |  | IK03 |  |  |  |  | 650°C | T <sub>a</sub> 0<br>+35 |
|---------------------------|--|--|--|------|--|--|--|--|-------|-------------------------|

### Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire. LED driver, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless. Class II electrical (this product is not earthed), IP40\_IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate hexagonal comfort optic. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 55 mm  
Luminaire input power: 43 W  
Luminaire luminous flux: 4450 lm  
Luminaire efficacy: 103 lm/W  
Weight: 5.44 kg



TLG\_OMP2\_F\_QH\_PDB.jpg

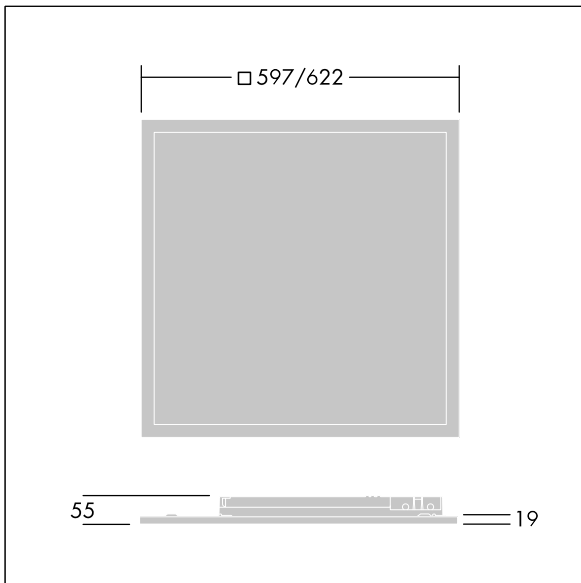

TLG\_OMP2\_M\_Q.wmf

This product contains a light source of energy efficiency class E.