

Omega Pro 2

92917584 OP2 4400-940 CKIT HX BC Q600

IEC EN 60598-1 RG 0				IK03					650°C	T _a 0 +35
---------------------------	--	--	--	------	--	--	--	--	-------	-------------------------

Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire. LED driver, Wireless controlled via App with Bluetooth® 4.x - basicDIM Wireless. Class II electrical (this product is not earthed), IP40_IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate hexagonal comfort optic. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 90

Radio definition: basicDIM Wireless - Bluetooth® 4.x,
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 55 mm
Luminaire input power: 43 W
Luminaire luminous flux: 4450 lm
Luminaire efficacy: 103 lm/W
Weight: 5.44 kg



TLG_OMP2_F_QH_PDB.jpg

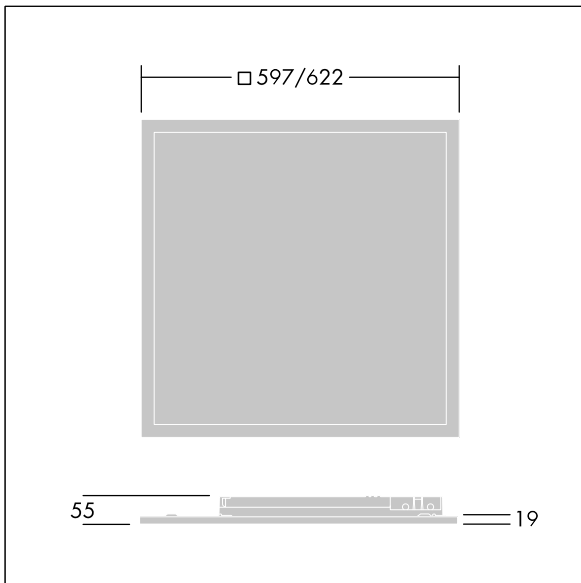

TLG_OMP2_M_Q.wmf

This product contains a light source of energy efficiency class E.

Omega Pro 2

92917584 OP2 4400-940 CKIT HX BC Q600

THORN