

96633570 DIFF 3 5000-840 HFIX L1500 LOS

IP40	IK06					650°C	T _a 25	
------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	-------------------	--


Diffusalux

A surface mounted, LED luminaire. DALI dimmable LED driver. Class I electrical, IP40. Body: white painted steel. End caps: polycarbonate with a curved, extruded opal polycarbonate diffuser. Ø21.5mm cable entry hole in the centre of the back spine. Standard BESA fixings at 600mm centres. Piano key terminal block. Complete with 4000K LED. Lumen output can be selected by internal link/switch. HF versions can select the following: 3050lm (LO) / 4750lm (ME) / 6300lm (HI). HFIX versions can select the following: 3250lm (LO) / 5500lm (ME). Default setting is Medium mode. For exact photometric and power information – please visit website and select drop down with LO / ME / HI modes.

Dimensions: 1490 x 200 x 81 mm
Weight: 2.7 kg



TLG_DFX3_F_PDB.jpg

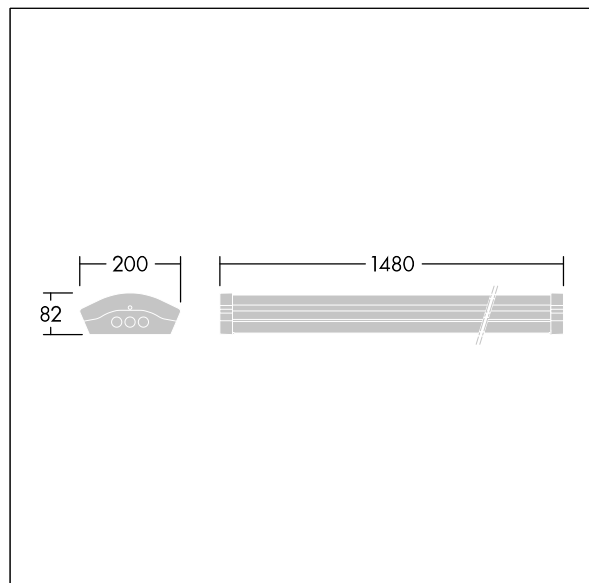

TLG_DFX3_M_LD1.wmf

This product contains a light source of energy efficiency class D.

Diffusalux

96633570 DIFF 3 5000-840 HFIX L1500 LOS

THORN