


Aquaforce Pro


THORN

99934950 AQFPRO S LED4300-840 PC MB MWS E3



Aquaforce Pro

Call the sales office for a quote.

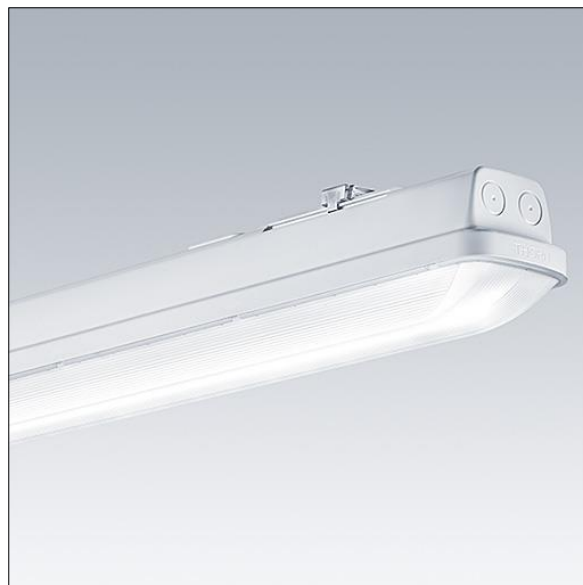

TLG_AQUP_F_PDB_1100MED.jpg

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting