

# Omega Pro 2 Mini

96634315 OP2 900-930 OP HFIX Q300 MRP

THORN

IEC EN 60598-1 RG 0		IP20 ↑ IP40	IK03				650°C	T <sub>a</sub> 0 +35	
---------------------------	---	-------------------	------	---	---	---	-------	-------------------------	--

## Omega Pro 2 Mini


A shallow, versatile edge lit LED luminaire for lay-in and plasterboard ceilings as well as surface mounting with additional collar. LED driver, DALI-2 dimmable. Class II electrical (this product is not earthed), IP20, Impact strength: IK03. Body: steel sheet, finished white (close to RAL9016). Diffuser: UV-stabilised polymethylmethacrylate opal optic for wide light distribution. Electrical connection via piano key terminals, loop-in/loop-out possible. Complete with 3000K LED, Colour Rendering Index min.: 90

..

Dimensions: 297 x 297 x 46 mm  
Luminaire input power: 9.5 W  
Luminaire luminous flux: 804 lm  
Luminaire efficacy: 85 lm/W  
Weight: 1.43 kg



TLG\_OMP2\_F\_Q3OP.jpg

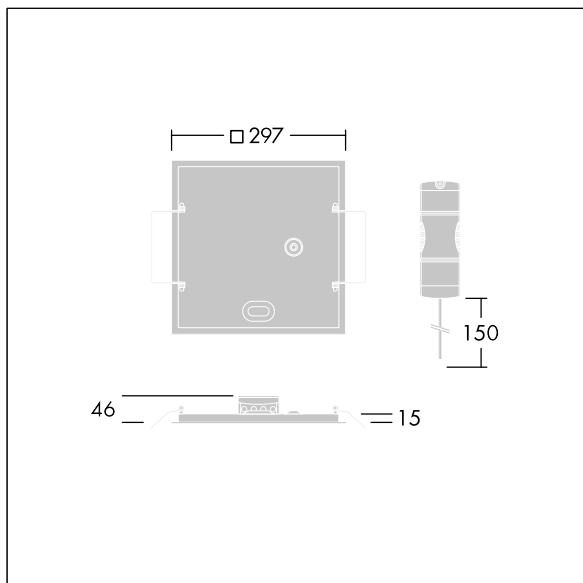

TLG\_OMP2\_M\_Q3.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## **Omega Pro 2 Mini**

**96634315 OP2 900-930 OP HFIX Q300 MRP**

THORN