

## 96634051 KAT SQ 2400-840 HFI

	IP65		IK10					850°C		T <sub>a</sub> -15 +35
-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	-----------------------------------------------------------------------------------	---------------------------


### Katona

A very slim, square functional LED luminaire. DALI dimmable LED driver. Body: polycarbonate. Diffuser: opal polycarbonate. Class II electrical, IP65, IK10. Complete with 4000K LED. Suitable for direct mounting to wall or ceiling. Loop-in, loop-out is possible for cables up to 2.5mm<sup>2</sup>. BESA compatible.

Dimensions: 277 x 277 x 58 mm  
 Luminaire input power: 22.1 W  
 Luminaire luminous flux: 2400 lm  
 Luminaire efficacy: 109 lm/W  
 Weight: 1.1 kg



TLG\_KATO\_F\_SQ\_PDB.jpg

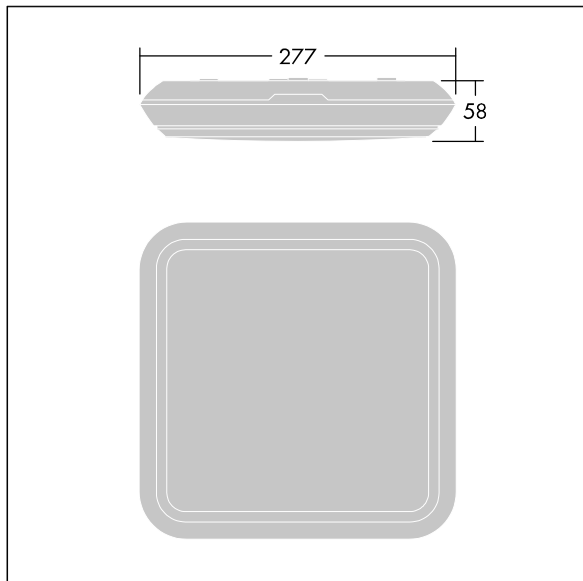

TLG\_KATO\_M\_SQ\_LDS.wmf

This product contains a light source of energy efficiency class C.

**Katona**

**96634051 KAT SQ 2400-840 HFI**

THORN