

92925248 POPPACK LED 6000 840 HFI E3D L1500

IP20	IK03						T_a 0 +25	
------	------	---	---	---	---	---	----------------	--


PopPack

Batten LED luminaire. Electronic, DALI dimmable control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm² terminal block. Complete with 4000K LED

Dimensions: 1449 x 60 x 74 mm
 Luminaire input power: 52.8 W
 Luminaire luminous flux: 6400 lm
 Luminaire efficacy: 121 lm/W
 Weight: 1.65 kg



TLG_POPL_F_PDB_EMPTY.jpg

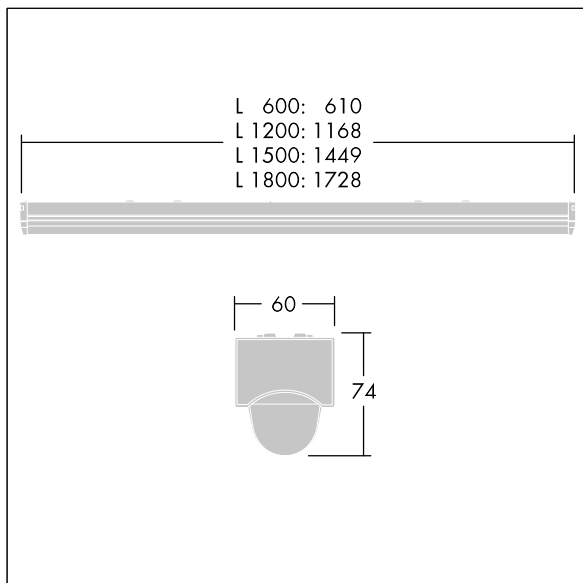

TLG_POPL_M_LD1.wmf

This product contains light sources of energy efficiency class D.

PopPack

92925248 POPPACK LED 6000 840 HFI E3D L1500

THORN