

# Beta 3

## 96634493 BETA 3 3200-840 HFIX LRO Q600

|                           |                |      |  |  |  |  |  |        |                           |
|---------------------------|----------------|------|--|--|--|--|--|--------|---------------------------|
| IEC EN<br>60598-1<br>RG 0 | ↓IP20<br>↑IP44 | IK03 |  |  |  |  |  | 650 °C | T <sub>a</sub> -20<br>+40 |
|---------------------------|----------------|------|--|--|--|--|--|--------|---------------------------|


### Beta 3

A square ceiling recessed LED luminaire. DALI dimmable LED driver. Class II electrical (this product is not earthed), IP44\_IP20, Impact strength: IK03. Body: steel sheet, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. Supplied with safety wire. Complete with 4000K LED.

Dimensions: 596 x 596 x 34 mm  
Luminaire input power: 26 W  
Luminaire luminous flux: 3200 lm  
Luminaire efficacy: 123 lm/W  
Weight: 2.11 kg



TLG\_BET3\_F\_MREQ.jpg

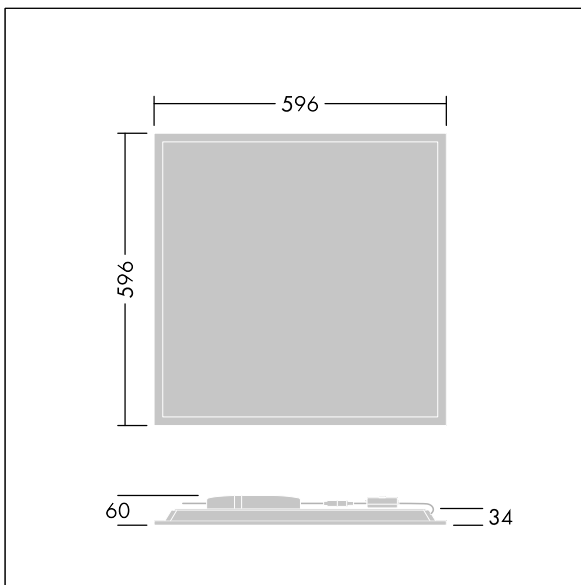

TLG\_BET3\_M\_Q600.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Beta 3**

**96634493 BETA 3 3200-840 HFIX LRO Q600**

**THORN**