

# Cetus3

# THORN

## 96634900 CETUS3 MSF LCS EHF RWH

IEC EN 60598-1 RG 1	UK CA	IP43	halogen	IK03	⊕	CE	⚡	⚙️	850°C	T <sub>a</sub> -20 +25
---------------------------	----------	------	---------	------	---	----	---	----	-------	---------------------------

### Cetus3


Surface mounted LED downlight. Fixed output LED driver. Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43. Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory. Electrical connection via 3/5 pole, push in, terminal block, Housing mounts to installation plate with twist and lock bayonet mechanism.

Equipped with LCS technology, with two lumen outputs (800lm and 1500lm) and three colour temperatures (3000K, 3500K and 4000K) selectable from below by a rotary switch. Pre-set to 4000K, high luminous flux..

Dimensions: Ø181 x 182 mm  
Luminaire input power: 25.3 W  
Luminaire luminous flux: 3221 lm  
Luminaire efficacy: 127 lm/W  
Weight: 2.59 kg



TLG\_CTU3\_F\_MSF\_RWH.jpg

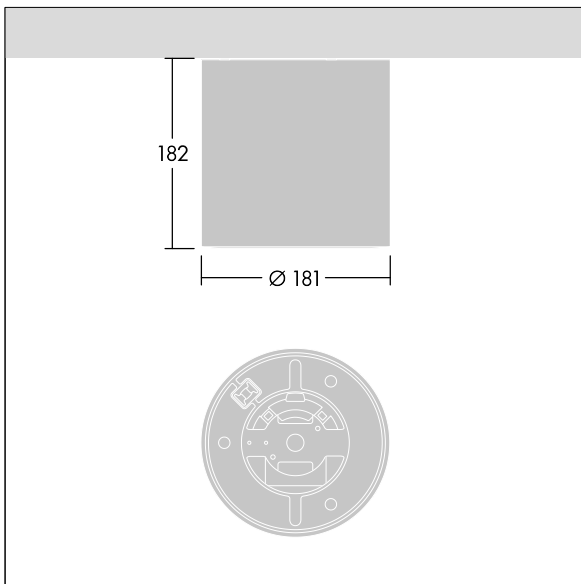

TLG\_CTU3\_M\_MSF.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Cetus3**

**96634900 CETUS3 MSF LCS EHF RWH**

**THORN**