

96635161 CT L 48L25-730 NR CL1 T76F ANT

| | | | | | | | | | | | | | |
|----------------|--------------|--------------------------|----------|----|------|------|---|----|---|---|---|------|--|
| ISO 9223 C5 | PLUG X 11 | ida DAK SECT APPROVED | UK CA | 11 | IP66 | IK08 | ⏏ | CE | ⚡ | ⚙ | ⚙ | Ta35 | |
|----------------|--------------|--------------------------|----------|----|------|------|---|----|---|---|---|------|--|

Carat


An elegant urban lantern with durable performance. Programmable LED driver, set for fixed output, driving 48 LEDs at 250mA. Body: large size, die-cast aluminium (EN AC-44300), anthracite (close to RAL7043). Shaft: Cover: glass. Fixings: stainless steel with anti-galvanic treatment. Narrow Road optic, with Colour Rendering Index min.: 70 Correlated colour temperature*: 3000 Kelvin LEDs supplied. Class I electrical, Impact strength: IK08, IP66, Ta max.: 35°C. Supplied with Ø76mm spigot adaptor pre-fitted for post-top, 5° tilt.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: Ø510 x 87 mm
Luminaire input power: 36 W
Luminaire luminous flux: 5580 lm
Luminaire efficacy: 155 lm/W
Weight: 9.3 kg
Scx: 0.05 m²



TLG_CARA_F_L_PostTop.jpg

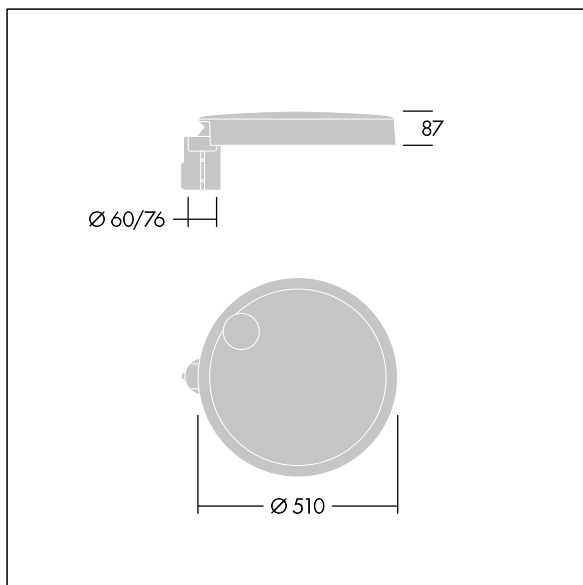

TLG_CARA_M_LMTP.wmf

This product contains a light source of energy efficiency class D.