

96635242 CETUS3 L 3000-840 HFIX RSB

IEC EN 60598-1 RG 1	UK CA	11	IP20 IP44	halogen	IK 06	CE	850°C	T _a -20 +25	
---------------------------	----------	----	--------------	---------	-------	----	-------	---------------------------	--


Cetus3

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø190-230 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP44_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 4000K LED

Dimensions: Ø248 x 100 mm
 Luminaire input power: 26.9 W
 Luminaire luminous flux: 3388 lm
 Luminaire efficacy: 126 lm/W
 Weight: 0.82 kg



TLG_CTU3_F_L_LED_RSB_Persp.jpg

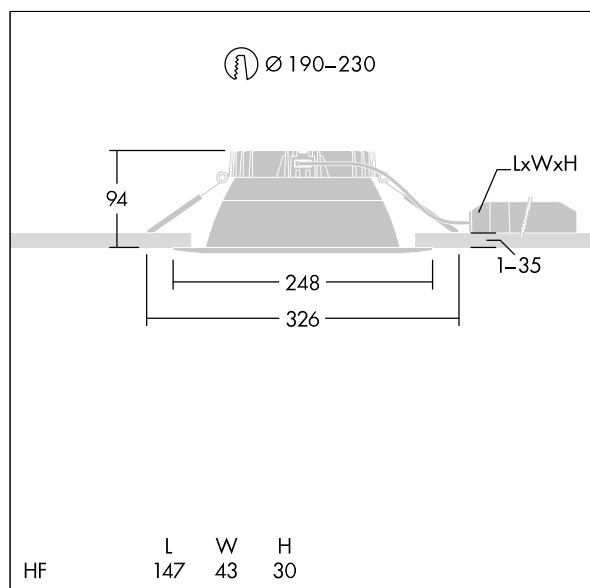

TLG_CTU3_M_HFL.wmf

This product contains a light source of energy efficiency class C.

Cetus3

96635242 CETUS3 L 3000-840 HFIX RSB

THORN