

## Beta 3

THORN

### 92937910 BETA 3 4100-830 HF E3 LRO 3X12

|                           |   |   |      |   |   |   |   |       |                         |  |
|---------------------------|---|---|------|---|---|---|---|-------|-------------------------|--|
| IEC EN<br>60598-1<br>RG 0 |  |  | IK03 |  |  |  |  | 650°C | T <sub>a</sub> 0<br>+25 |  |
|---------------------------|---|---|------|---|---|---|---|-------|-------------------------|--|


#### Beta 3

A rectangular ceiling recessed LED luminaire. Fixed output LED driver with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP44 IP20, Impact strength: IK03. Body: steel sheet, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. Supplied with safety wire. Complete with 3000K LED.

Dimensions: 1196 x 296 x 34 mm  
Luminaire input power: 33.6 W  
Luminaire luminous flux: 3690 lm  
Luminaire efficacy: 110 lm/W  
Weight: 3.6 kg



TLG\_BET3\_F\_MRER.jpg

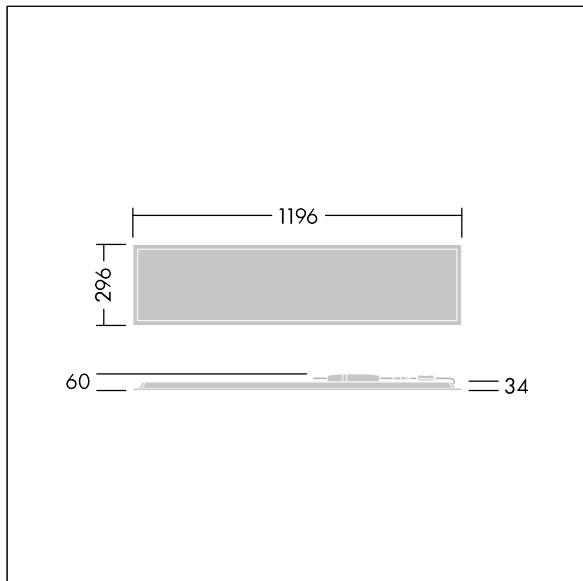

TLG\_BET3\_M\_3X12.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Beta 3**

**92937910 BETA 3 4100-830 HF E3 LRO 3X12**

THORN