

| | | | | | | | | | | |
|---------------------------|----------|------|---------|------|---|----|---|-------|---------------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | IP43 | halogen | IK06 | ⏏ | CE | ⚡ | 850°C | T _a -20 +25 | |
|---------------------------|----------|------|---------|------|---|----|---|-------|---------------------------|--|


Cetus3

Surface mounted LED downlight. Fixed output LED driver.
 Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43.
 Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory.
 Electrical connection via 3/5 pole, push in, terminal block, Housing mounts to installation plate with twist and lock bayonet mechanism. Complete with 3000K LED

Dimensions: Ø181 x 182 mm
 Luminaire input power: 25.3 W
 Luminaire luminous flux: 3089 lm
 Luminaire efficacy: 122 lm/W
 Weight: 2.59 kg



TLG_CTU3_F_MSF_RWH.jpg

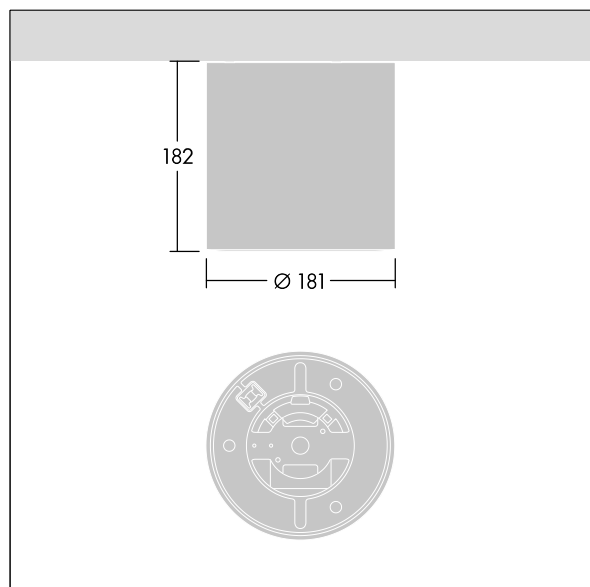

TLG_CTU3_M_MSF.wmf

This product contains a light source of energy efficiency class D.