

| | | | | | | | | | | | | |
|---------------------|-------|---|----------------|---------|------|--|----|--|--|-------|------------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | X | IP20 ↑ IP43 | halogen | IK03 | | CE | | | 850°C | T _a 5 25 | |
|---------------------|-------|---|----------------|---------|------|--|----|--|--|-------|------------------------|--|

Cetus3


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø190-230 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP43_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 3000K LED

For installation in concrete ceilings please contact sales

Dimensions: Ø248 x 100 mm
 Luminaire input power: 26.9 W
 Luminaire luminous flux: 3321 lm
 Luminaire efficacy: 123 lm/W
 Weight: 1.33 kg



TLG_CTU3_F_L_LED_RWH_Persp.jpg

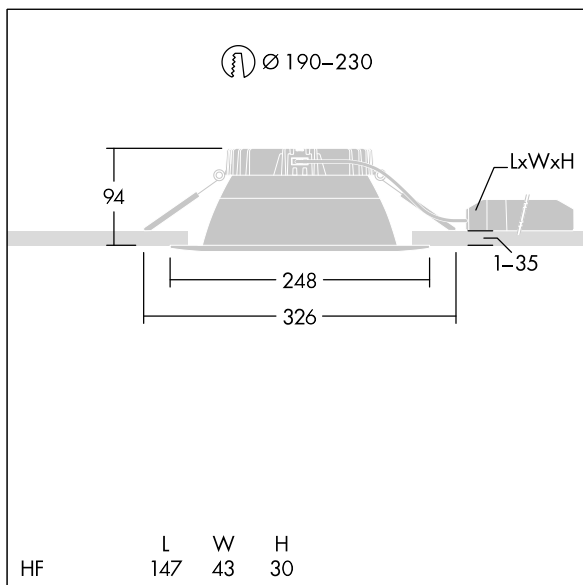

TLG_CTU3_M_HFL.wmf

Cetus3

92943844 CETUS3 L 3000-830 HFIX E3D RWH

THORN