

| | | | | | | | | | | | | |
|------------------------|----------|---|----------------|---------|------|--|----|--|--|-------|------------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | X | IP20 ↑ IP43 | halogen | IK03 | | CE | | | 850°C | T _a 5 25 | |
|------------------------|----------|---|----------------|---------|------|--|----|--|--|-------|------------------------|--|

Cetus3


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with 3 hour, manual test, emergency lighting circuit. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP43_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 3000K LED

For installation in concrete ceilings please contact sales

Dimensions: Ø195 x 100 mm
Luminaire input power: 17.9 W
Luminaire luminous flux: 1965 lm
Luminaire efficacy: 110 lm/W
Weight: 0.81 kg



TLG_CTU3_F_M_LED_RWH_Persp.jpg

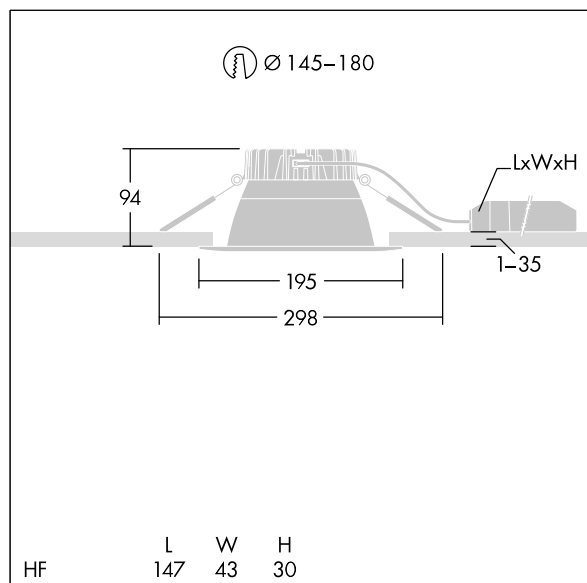

TLG_CTU3_M_HFM.wmf

This product contains a light source of energy efficiency class D.

Cetus3

92943845 CETUS3 M 2000-830 HF E3 RWH

THORN