


IEC EN 60598-1 RG 1	UK CA	11	IP20 ↑ IP44	halogen	IK 06	CE	850°C	T <sub>a</sub> -20 +25	
---------------------------	----------	----	----------------	---------	-------	----	-------	---------------------------	--

## Cetus3


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø190-230 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP44\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm.

Equipped with LCS technology, with two lumen outputs (2000lm and 3400lm) and three colour temperatures (3000K, 3500K and 4000K) selectable from below by a rotary switch. Pre-set to 4000K, high luminous flux.

Dimensions: Ø248 x 100 mm  
 Luminaire input power: 26.9 W  
 Luminaire luminous flux: 3473 lm  
 Luminaire efficacy: 129 lm/W  
 Weight: 0.82 kg

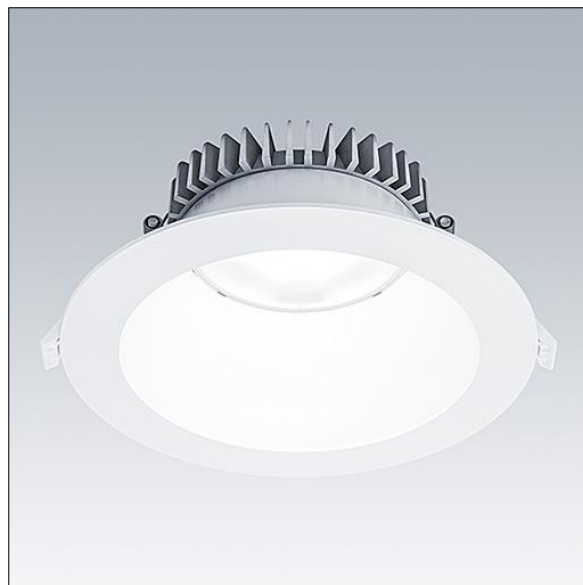

TLG\_CTU3\_F\_L\_LED\_RWH\_Persp.jpg

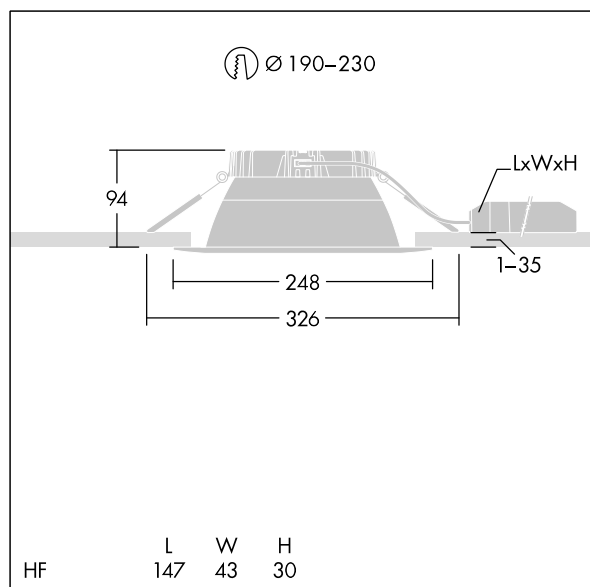

TLG\_CTU3\_M\_HFL.wmf

This product contains a light source of energy efficiency class D.

**Cetus3**

**92943859 CETUS3 L LCS HFIX RWH**

THORN