


# Cetus3

# THORN

## 92943863 CETUS3 M LCS HFIX RWH



### Cetus3


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP44\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm.

Equipped with LCS technology, with two lumen outputs (2000lm and 3400lm) and three colour temperatures (3000K, 3500K and 4000K) selectable from below by a rotary switch. Pre-set to 4000K, high luminous flux.

Dimensions: Ø195 x 100 mm  
Luminaire input power: 26.9 W  
Luminaire luminous flux: 3221 lm  
Luminaire efficacy: 120 lm/W  
Weight: 0.7 kg



TLG\_CTU3\_F\_M\_LED\_RWH\_Persp.jpg

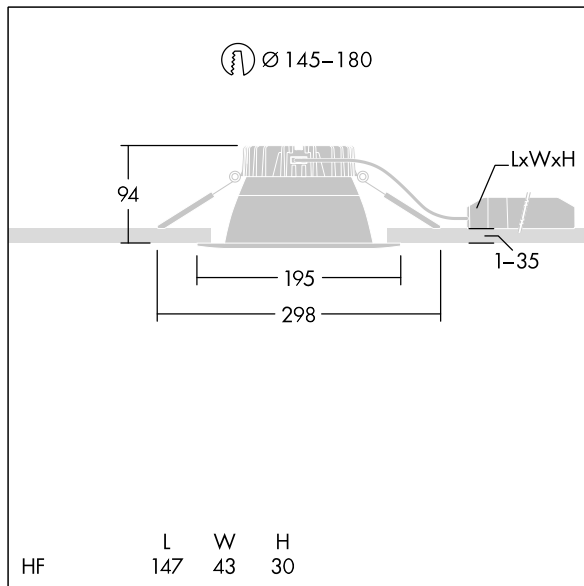

TLG\_CTU3\_M\_HFM.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Cetus3**

**92943863 CETUS3 M LCS HFIX RWH**

**THORN**