


# Cetus3

# THORN

## 92943865 CETUS3 S LCS HFIX E3D RWH



### Cetus3


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø95-125 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP43\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 25 mm.

For installation in concrete ceilings please contact sales. Equipped with LCS technology, with two lumen outputs (800lm and 1500lm) and three colour temperatures (3000K, 3500K and 4000K) selectable from below by a rotary switch. Pre-set to 4000K, high luminous flux.

Dimensions: Ø137 x 80 mm  
Luminaire input power: 14.2 W  
Luminaire luminous flux: 1509 lm  
Luminaire efficacy: 106 lm/W  
Weight: 0.95 kg



TLG\_CTU3\_F\_S\_LED\_RWH\_Persp.jpg

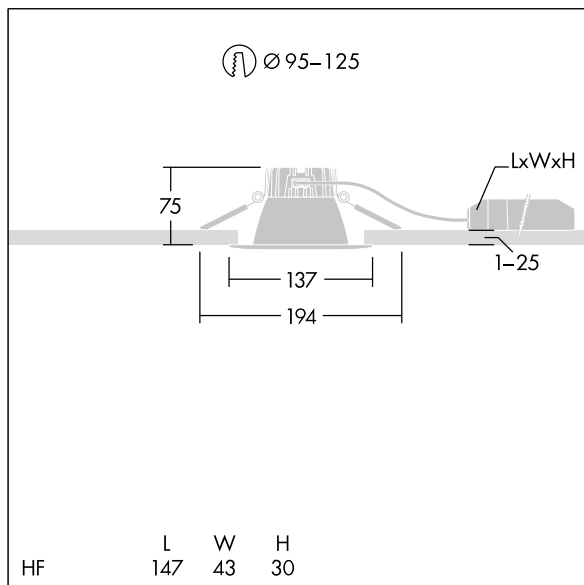

TLG\_CTU3\_M\_HFS.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement. © Thorn Lighting

**Cetus3**

**92943865 CETUS3 S LCS HFIX E3D RWH**

**THORN**