


IEC EN 60598-1 RG 1	UK CA		IP20 ↑ IP43	halogen	IK03		CE			850°C	T <sub>a</sub> 5 25	
---------------------------	----------	--	----------------	---------	------	--	----	--	--	-------	------------------------	--

### Cetus3


A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø190-230 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP43\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 4000K LED

For installation in concrete ceilings please contact sales

Dimensions: Ø248 x 100 mm  
 Luminaire input power: 16.2 W  
 Luminaire luminous flux: 2208 lm  
 Luminaire efficacy: 136 lm/W  
 Weight: 1.31 kg

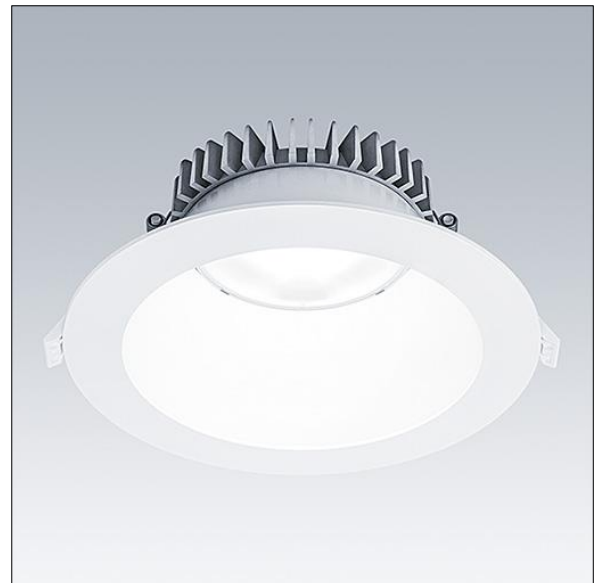

TLG\_CTU3\_F\_L\_LED\_RWH\_Persp.jpg

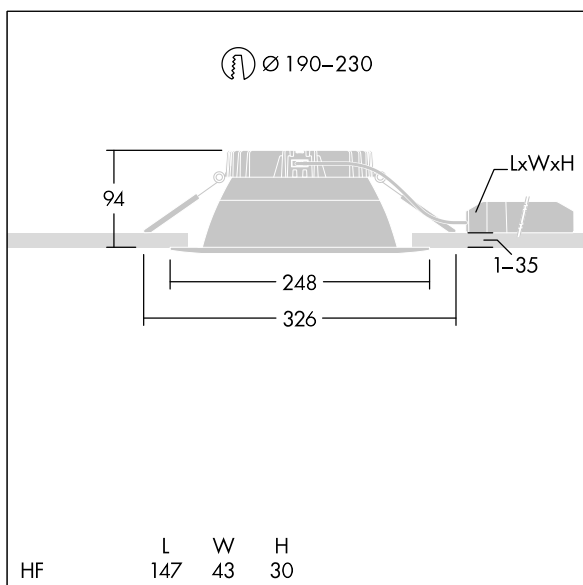

TLG\_CTU3\_M\_HFL.wmf

This product contains a light source of energy efficiency class C.

**Cetus3**

**92943879 CETUS3 L 2000-840 HFIX E3D RWH**

**THORN**