

# Cetus3

THORN

92943887 CETUS3 M 3000-840 HFIX RWH

IEC EN 60598-1 RG 1	UK CA	11	IP20 ↑ IP44	halogen	IK 06	CE	850°C	T <sub>a</sub> -20 +25	
------------------------	----------	----	----------------	---------	-------	----	-------	---------------------------	--


## Cetus3

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP44\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 4000K LED

Dimensions: Ø195 x 100 mm  
 Luminaire input power: 26.9 W  
 Luminaire luminous flux: 3222 lm  
 Luminaire efficacy: 120 lm/W  
 Weight: 0.7 kg



TLG\_CTU3\_F\_M\_LED\_RWH\_Persp.jpg

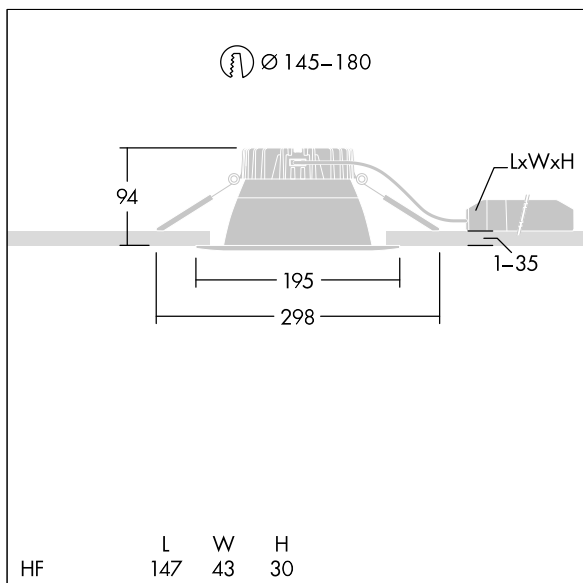

TLG\_CTU3\_M\_HFM.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting