

IEC EN 60598-1 RG 1	UK CA	11	IP20 IP44	halogen	IK 06	CE	850°C	T <sub>a</sub> -20 +25	
---------------------------	----------	----	--------------	---------	-------	----	-------	---------------------------	--


## Cetus3

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø95-125 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical (this product is not earthed), IP44\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 25 mm. Complete with 4000K LED

Dimensions: Ø137 x 80 mm  
 Luminaire input power: 14.2 W  
 Luminaire luminous flux: 1511 lm  
 Luminaire efficacy: 106 lm/W  
 Weight: 0.44 kg



TLG\_CTU3\_F\_S\_LED\_RWH\_Persp.jpg

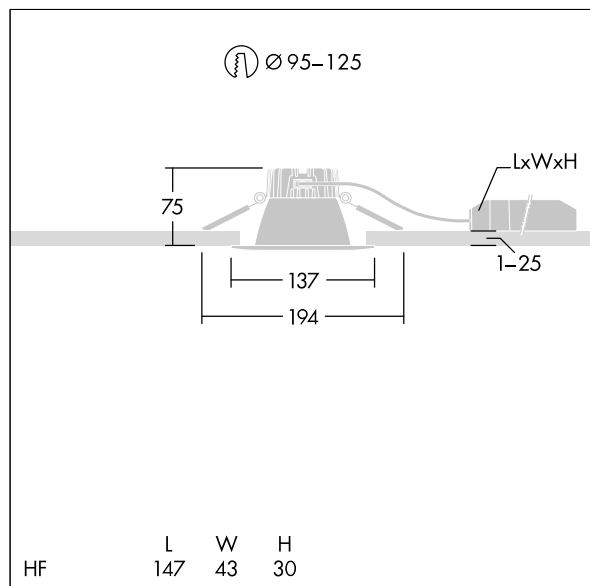

TLG\_CTU3\_M\_HFS.wmf

This product contains a light source of energy efficiency class C.

**Cetus3**

**92943889 CETUS3 S 1500-840 HFIX RWH**

THORN