

# Cetus3

# THORN

92943896 CETUS3 MSF 3000-840 HFIX RWH

IEC EN 60598-1 RG 1	UK CA	IP43	halogen	IK06	⊕	CE	⚡	850°C	T <sub>a</sub> -20 +25
---------------------------	----------	------	---------	------	---	----	---	-------	---------------------------


## Cetus3

Surface mounted LED downlight. DALI dimmable LED driver SwitchDIM compatible. Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43. Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory. Electrical connection via 3/5 pole, push in, terminal block, Housing mounts to installation plate with twist and lock bayonet mechanism. Complete with 4000K LED

Dimensions: Ø181 x 182 mm  
Luminaire input power: 25.4 W  
Luminaire luminous flux: 3222 lm  
Luminaire efficacy: 127 lm/W  
Weight: 2.71 kg



TLG\_CTU3\_F\_MSF\_RWH.jpg

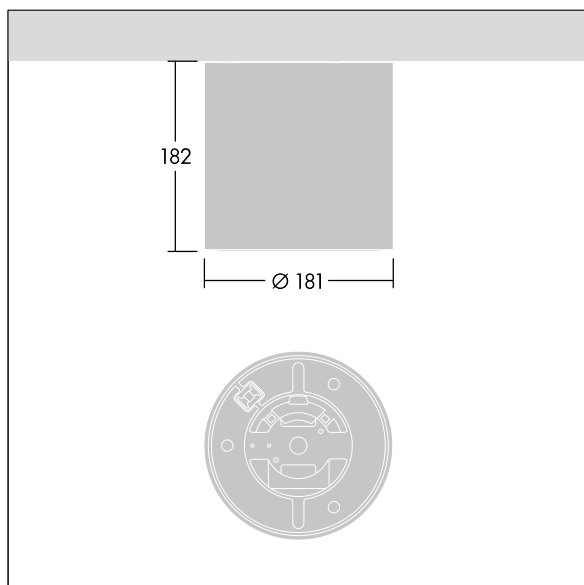

TLG\_CTU3\_M\_MSF.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Cetus3**

**92943896 CETUS3 MSF 3000-840 HFIX RWH**

**THORN**