

## Beta 3

THORN

### 92954101 BETA 3 3200-840 HFIX E3D LRO 3X12

|                           |   |                |      |   |   |   |   |        |                         |  |
|---------------------------|---|----------------|------|---|---|---|---|--------|-------------------------|--|
| IEC EN<br>60598-1<br>RG 0 |  | IP20<br>↑ IP44 | IK03 |  |  |  |  | 650 °C | T <sub>a</sub> 0<br>+25 |  |
|---------------------------|---|----------------|------|---|---|---|---|--------|-------------------------|--|


#### Beta 3

A rectangular ceiling recessed LED luminaire. DALI dimmable LED driver with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP44\_IP20, Impact strength: IK03. Body: steel sheet, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. Supplied with safety wire. Complete with 4000K LED.

Dimensions: 1196 x 296 x 34 mm  
Luminaire input power: 26 W  
Luminaire luminous flux: 3200 lm  
Luminaire efficacy: 123 lm/W  
Weight: 4 kg



TLG\_BET3\_F\_MRER.jpg

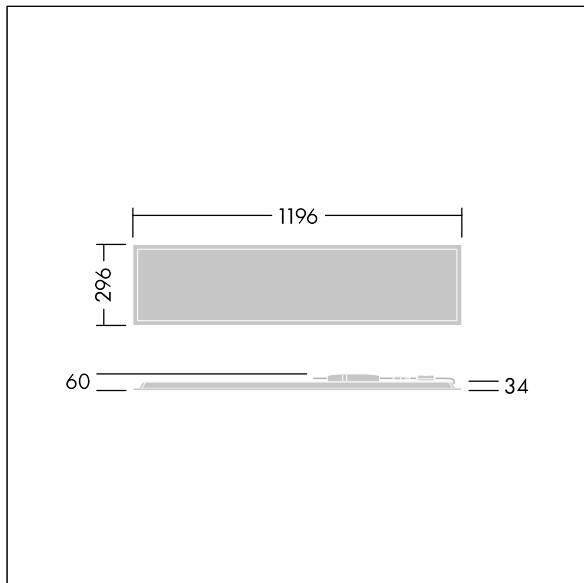

TLG\_BET3\_M\_3X12.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Beta 3**

**92954101 BETA 3 3200-840 HFIX E3D LRO 3X12**

THORN