

# Punch

## 96635735 PUNCH 3 LV MSC 4000-830 L12 HFIX

THORN

UK CA	IP20	IK03	⏚	CE			650°C	T <sub>a</sub> 0 +25	
----------	------	------	---	----	---	---	-------	-------------------------	--

### Punch


A slim, surface mounted luminaire with direct distribution.  
DALI dimmable Electronic,. Body: steel sheet, powder coated white (close to RAL9016). Endcaps: steel sheet powder coated white (close to RAL9016). Louvre: glossy aluminium,. Class I electrical, IP20, Impact strength: IK03.  
Electrical connection via piano key terminal block.  
Complete with 3000K LED.

Can be used as a suspended direct only luminaire when combined with Y-Suspension connector and suspension kit (to be ordered separately 22171581 & 22171349).

Dimensions: 1301 x 162 x 56 mm  
Luminaire input power: 29 W  
Luminaire luminous flux: 3900 lm  
Luminaire efficacy: 134 lm/W  
Weight: 3.5 kg



TLG\_PNCH\_F\_LOUVRE\_surface\_on.jpg

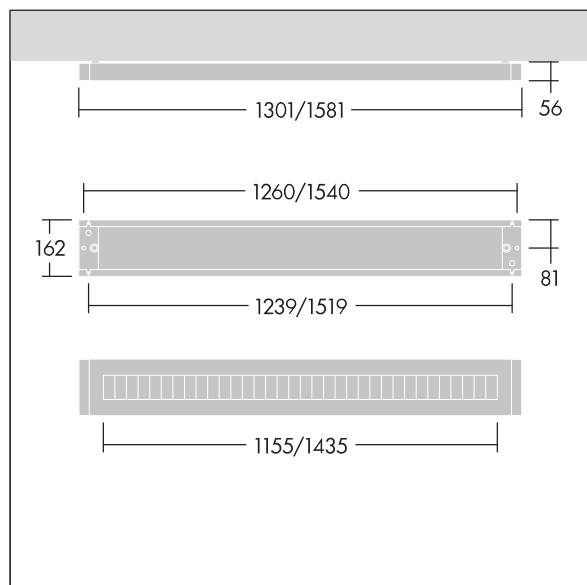

TLG\_PNC3\_M\_LV\_RESD.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Punch**

**96635735 PUNCH 3 LV MSC 4000-830 L12 HFIX**

THORN