

Voyager Star


High performance, surface mounted LED emergency lighting luminaire, Luminaire with local battery supply for 3 hr. emergency lighting in maintained or non-maintained mode, with automatic test (auto-test) via the luminaire, optional central monitoring via DALI, display of luminaire status via status LED with optic.. Housing: aluminium die casting alloy, powder coated silver grey (close to RAL 9006). Gear tray: galvanised steel sheet. Lens: polycarbonate. IP40,. Luminaire can be installed quickly and maintained without tools. Electrical connection (230VAC) via maximum 2.5mm² cable, loop in - loop out possible. Optimum thermal management via heat sink. Maintained mode: +5°C to +30°C, non-maintained mode: +5°C to +35°C; power supply: 220-240 V AC (+/- 10%), 50-60 Hz Complete with LEDs..

Self-contained emergency luminaires rely on long-lasting batteries. Thorn batteries are robust and comes with a three-year guarantee (applicable subject to the terms and conditions of and to the extent as set forth in the manufacturer's guarantee on Thorn products, which shall be applicable analogously and which is available under http://www.thornlighting.com/en/products/5-year-guarantee/5-year-warranty/terms-of-guarantee_en.pdf. The battery guarantee shall not come into effect if the product has been installed later than three(3) months after delivery EXW (Incoterms 2010).

Luminaire input power: 4.2 W
Dimensions: 146 x 146 x 34 mm
Weight: 0.75 kg



TLG_VSTR_F_MSC_side_ExD_SPOT_SR.jpg

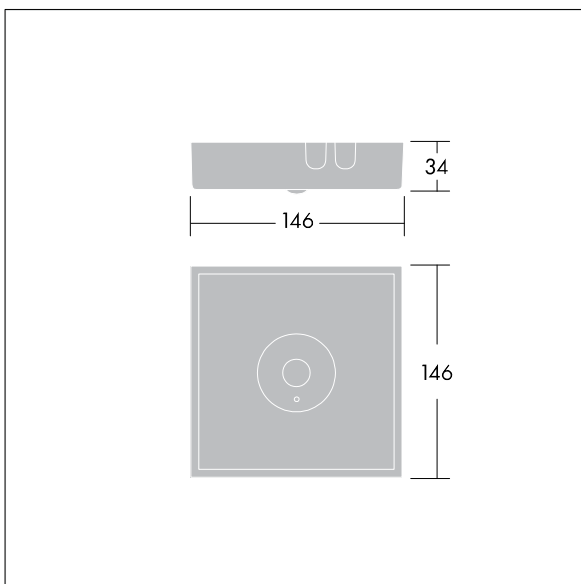

TLG_VYLD_M_MCE SPOT.wmf

Voyager Star

96637551 VOYAGER STAR MSC SPOT E3D SR

THORN