

## 96636341 IS XS 24L35-730 NR CL1 WS0.3 M60 GY-S

ISO 9223 C5	ida DAK SKY APPROVED	IP66	IK08		CE				T <sub>a</sub> 35	
----------------	-------------------------	------	------	--	----	--	--	--	-------------------	--

### Isaro

A discrete and flexible road and street lantern with durable high performance. Programmable LED driver, set for fixed output, driving 24 LEDs at 350mA. Body: extra small size, die-cast aluminium (EN AC-44300), powder coated textured Light grey textured (150) - partly painted. Shaft: Light grey textured (150) - partly painted. Cover: Extra White glass. Fixings: stainless steel with anti-galvanic treatment. narrow road optic, with Colour Rendering Index min.: 70, Correlated colour temperature\*: 3000 Kelvin LEDs supplied. Class I electrical, Impact strength: IK08, IP66, Ta max.: °C. Supplied with Ø60mm spigot adaptor which can be fitted for post-top (0°/5°/10° tilt) or side-entry (-20°/-15°/-10°/-5°/0° tilt). Pre-wired with 0.3m, 1.5mm² H07RN-F cable.

Dimensions: 508 x 180 x 157 mm

Luminaire input power: 25.7 W

Luminaire luminous flux: 3821 lm


Luminaire efficacy: 149 lm/W

Weight: 3.3 kg

Scx: 0.028 m²



TLG\_ISLC\_F\_XS\_ZU\_SR.jpg

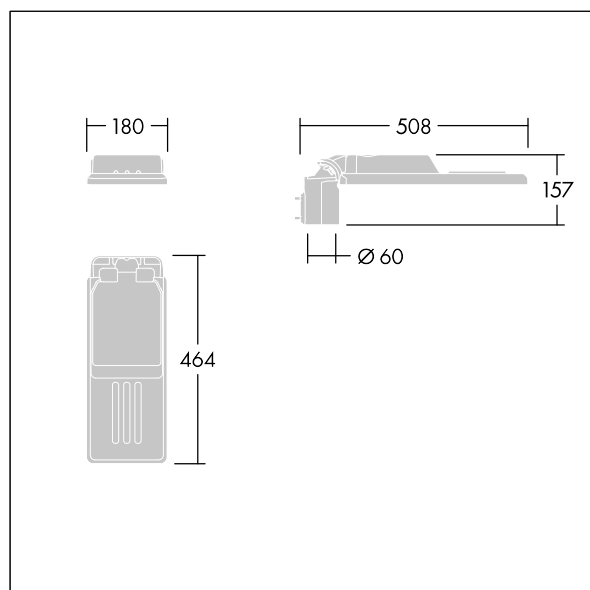

TLG\_ISLC\_M\_XSMTP60.wmf

This product contains a light source of energy efficiency class D.

**Isaro**

**96636341 IS XS 24L35-730 NR CL1 WS0.3 M60 GY-S**

**THORN**