








## 96636370 FORCELED 10000-840 HF

	IP66			IK10					850°C	T <sub>a</sub> -20 +30	
-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	---------------------------	--

### ForceLED

A compact IP66, dust and moisture proof LED luminaire.  
Electronic, fixed output control gear. Class I electrical, IK10.  
Canopy: fully recyclable aluminium painted white. Diffuser:  
UV stabilised polycarbonate with linear prisms. Toggles:  
stainless steel. For surface, BESA or suspended mounting.  
Quick-fix brackets supplied for surface mounting. Mounting  
kits for conduit, chain suspension and catenary suspension  
are available as accessories. Complete with 4000K LED.

ambient temperature: -20°C to +30°C

Dimensions: 735 x 180 x 95 mm

Luminaire input power: 75.2 W


Luminaire luminous flux: 10000 lm

Luminaire efficacy: 133 lm/W

Weight: 3 kg



TLG\_FORL\_F\_PDBUNLIT.jpg

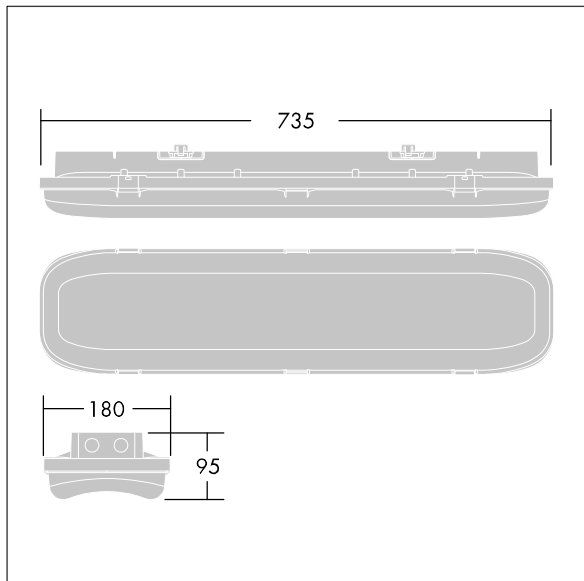

TLG\_FORL\_M\_LED.wmf

This product contains a light source of energy efficiency class C.