








## 92984198 FORCELED 10000 840 HFI QC5

|   |      |   |   |      |   |   |   |   |       |                           |  |
|---|------|---|---|------|---|---|---|---|-------|---------------------------|--|
|  | IP66 |  |  | IK10 |  |  |  |  | 850°C | T <sub>a</sub> -20<br>+30 |  |
|---|------|---|---|------|---|---|---|---|-------|---------------------------|--|

### ForceLED

A compact IP66, dust and moisture proof LED luminaire. Electronic, DALI dimmable control gear. Class I electrical, IK10. Canopy: fully recyclable aluminium painted white. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Equipped with 5 pole Quick Connect socket. Complete with 4000K LED.

ambient temperature: -20°C to +30°C

Dimensions: 735 x 180 x 95 mm

Luminaire input power: 75.2 W


Luminaire luminous flux: 10000 lm

Luminaire efficacy: 133 lm/W

Weight: 3.1 kg



TLG\_FORL\_F\_PDBUNLIT.jpg

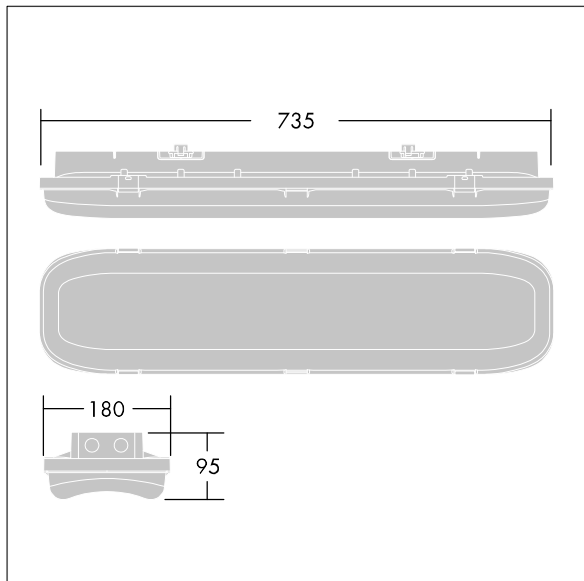

TLG\_FORL\_M\_LED.wmf

**ForceLED**

**92984198 FORCELED 10000 840 HFI QC5**

**THORN**