








## 92984676 FORCELED 4000 840 HF E3D

	IP66			IK10					850°C	T <sub>a</sub> 0 +35	
---	------	---	---	------	---	---	---	---	-------	-------------------------	--

### ForceLED


A compact IP66, dust and moisture proof LED luminaire. Electronic, fixed output control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IK10. Canopy: fully recyclable aluminium painted white. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Complete with 4000K LED.

ambient temperature: 0°C to +35°C

Dimensions: 735 x 180 x 95 mm  
Luminaire input power: 27.6 W  
Luminaire luminous flux: 4000 lm  
Luminaire efficacy: 145 lm/W  
Weight: 3.3 kg



TLG\_FORL\_F\_PDBUNLIT.jpg

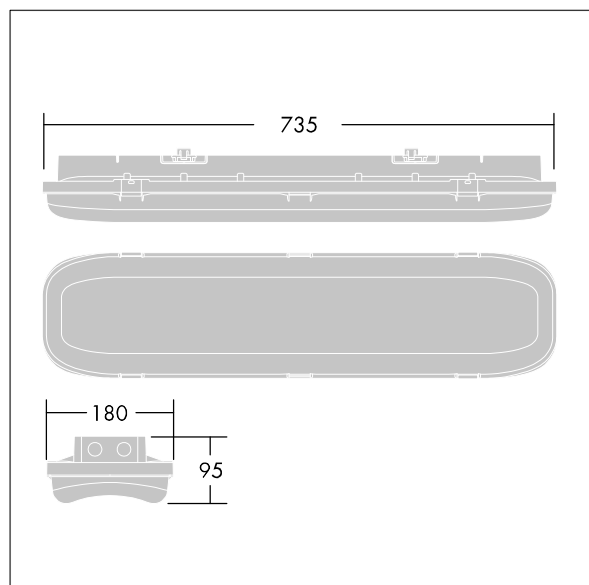

TLG\_FORL\_M\_LED.wmf

This product contains a light source of energy efficiency class C.

**ForceLED**

**92984676 FORCELED 4000 840 HF E3D**

**THORN**