

Chalice 3

92989190 CHAL3 100 1400-830 EHF RSB

| | | | | | | | | | | | |
|------------------------|----------|--|--|--|------|--|--|--|--|-------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | | | | IK08 | | | | | T _a 25 | |
|------------------------|----------|--|--|--|------|--|--|--|--|-------------------|--|


Chalice 3

A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø100mm cut-out with spring clips. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical (this product is not earthed), IP54_IP20. Complete with 3000K LED

Dimensions: Ø119 x 75 mm
 Luminaire input power: 13.8 W
 Luminaire luminous flux: 1470 lm
 Luminaire efficacy: 107 lm/W
 Weight: 0.41 kg



TLG_CHAL3_F_100_RSB.jpg

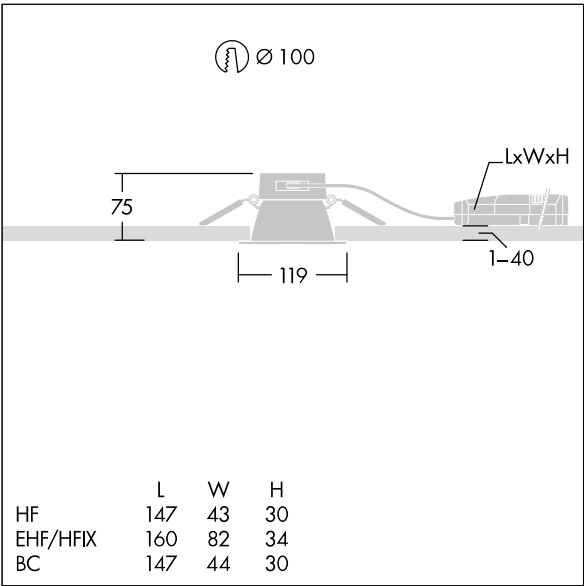

TLG_CHAL3_M_EHF100L.wmf

This product contains a light source of energy efficiency class C.

Chalice 3

92989190 CHAL3 100 1400-830 EHF RSB

THORN