

Chalice 3

92989201 CHAL3 100 800-940 HFIX RSB

IEC EN 60598-1 RG 1	UK CA	IP20	IP54	halogen	IK08	CE	850°C	T _a 25	
---------------------	-------	------	------	---------	------	----	-------	-------------------	--


Chalice 3

A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to mm and Ø100mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical (this product is not earthed), IP54_IP20. Complete with 4000K LED

Dimensions: Ø119 x 95 mm
 Luminaire input power: 8.5 W
 Luminaire luminous flux: 810 lm
 Luminaire efficacy: 95 lm/W
 Weight: 0.5 kg



TLG_CHAL3_F_100HP_RSB_2.jpg

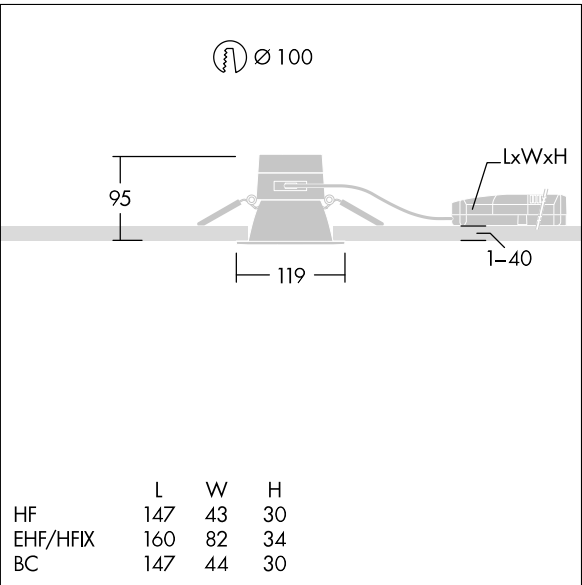

TLG_CHAL3_M_EHF100H.wmf

This product contains a light source of energy efficiency class D.

Chalice 3

92989201 CHAL3 100 800-940 HFIX RSB

THORN