

## Chalice 3

92992726 CHAL3 200 2000-840 EHF RSB IP65

IEC EN 60598-1 RG 1	UK CA	X	IP20 ↑ IP65	halogen	IK06		CE			850°C	T <sub>a</sub> 25	
------------------------	----------	---	----------------	---------	------	--	----	--	--	-------	-------------------	--


### Chalice 3

A highly efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø200mm cut-out with spring clips. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for highly efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam and additional ultrasonic welded clear polycarbonate cover IP65. Class II electrical (this product is not earthed), IP65\_IP20. Complete with 4000K LED

Dimensions: Ø223 x 96 mm  
 Luminaire input power: 14.7 W  
 Luminaire luminous flux: 1890 lm  
 Luminaire efficacy: 129 lm/W  
 Weight: 1 kg



TLG\_CHAL3\_F\_200\_RSB.jpg

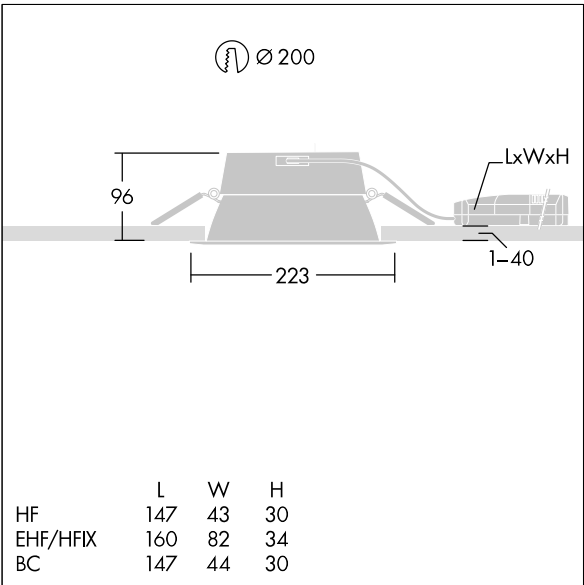

TLG\_CHAL3\_M\_EHF200.wmf

This product contains a light source of energy efficiency class B.

## Chalice 3

92992726 CHAL3 200 2000-840 EHF RSB IP65

THORN