

## Chalice 3

93901194 CHAL3 150 3000-830 EHF E3D RMB

IEC EN 60598-1 RG 1	UK CA	IP20	halogen	IK09	CE	850°C	Ta25	
---------------------	-------	------	---------	------	----	-------	------	--

### Chalice 3


A high efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø150mm cut-out with spring clips. Remote, pluggable, Fixed output LED driver NFC configurable with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for high efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in high glossy finish for improved glare control in office applications. Class II electrical (this product is not earthed), IP54\_IP20. Complete with 3000K LED

Installation in concrete ceilings not permitted.

Dimensions: Ø174 x 94 mm  
 Luminaire input power: 30.3 W  
 Luminaire luminous flux: 3193 lm  
 Luminaire efficacy: 105 lm/W  
 Weight: 1.13 kg



TLG\_CHAL3\_F\_150\_RMB\_IP54\_EMG.jpg

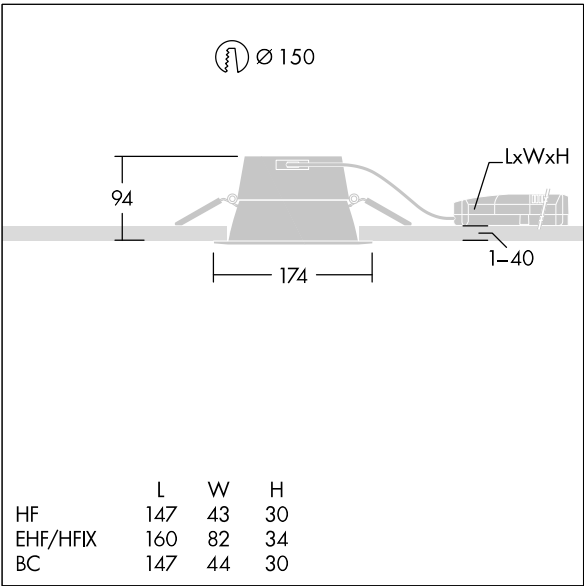

TLG\_CHAL3\_M\_EHF150.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting

## Chalice 3

93901194 CHAL3 150 3000-830 EHF E3D RMB

THORN