

Chalice 3

THORN

93901198 CHAL3 150 2000-840 EHF E3D RMB

| | | | | | | | | | | | | | |
|---------------------------|----------|--|--|--|---------|------|--|--|--|--|-------|-------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | | | | halogen | IK09 | | | | | 850°C | T _a 25 | |
|---------------------------|----------|--|--|--|---------|------|--|--|--|--|-------|-------------------|--|


Chalice 3

A high efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø150mm cut-out with spring clips. Remote, pluggable, Fixed output LED driver NFC configurable with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: die-cast aluminium for high efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in high glossy finish for improved glare control in office applications. Class II electrical (this product is not earthed), IP54_IP20. Complete with 4000K LED

Dimensions: Ø174 x 94 mm
 Luminaire input power: 19.7 W
 Luminaire luminous flux: 2172 lm
 Luminaire efficacy: 110 lm/W
 Weight: 1.13 kg



TLG_CHAL3_F_150_RMB_IP54_EMG.jpg

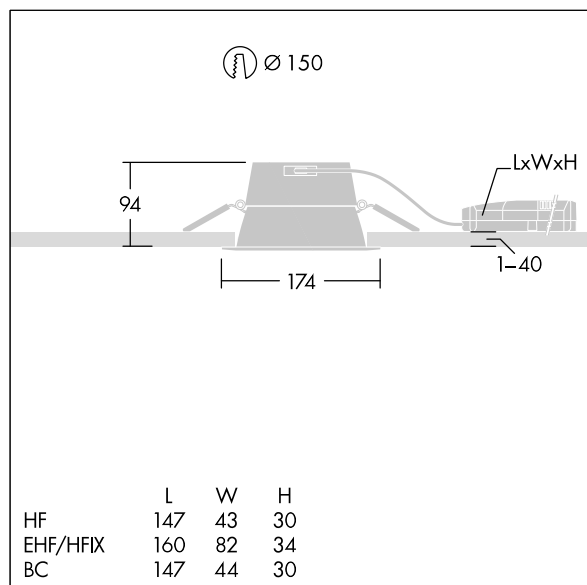

TLG_CHAL3_M_EHF150.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Chalice 3

93901198 CHAL3 150 2000-840 EHF E3D RMB

THORN