

Chalice 3

93901257 CHAL3 150 3000-840 HFIX E3 RSB

| | | | | | | | | | | | | |
|------------------------|----------|--|--|--|------|--|--|--|--|--|-------------------|--|
| IEC EN 60598-1 RG 1 | UK CA | | | | IK09 | | | | | | T _a 25 | |
|------------------------|----------|--|--|--|------|--|--|--|--|--|-------------------|--|

Chalice 3


A high efficient and sustainable LED downlight with low height. Suitable for mounting in ceiling thicknesses of 1 to 40 mm and Ø150mm cut-out with spring clips. Remote, pluggable, DALI-2 dimmable LED driver NFC configurable, SwitchDIM compatible with 3 hour, manual test, emergency lighting circuit. Body: die-cast aluminium for high efficient thermal management with recycling content >90%. Diffuser: polycarbonate. Reflector and trim: polycarbonate smooth reflector in satinbrite finish with wide beam. Class II electrical (this product is not earthed), IP54_IP20. Complete with 4000K LED

Installation in concrete ceilings not permitted.

Dimensions: Ø174 x 94 mm
 Luminaire input power: 30.2 W
 Luminaire luminous flux: 3130 lm
 Luminaire efficacy: 104 lm/W
 Weight: 1.14 kg



TLG_CHAL3_F_150_RSB_EM.jpg

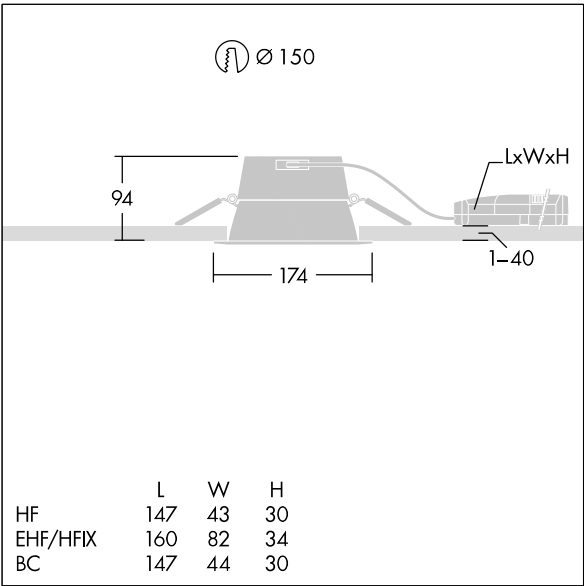

TLG_CHAL3_M_EHF150.wmf

This product contains a light source of energy efficiency class B.

Chalice 3

93901257 CHAL3 150 3000-840 HFIX E3 RSB

THORN