



Thor Bollard

Elegant vandal resistant bollard with high performance optic offering a comfortable light and energy saving solution

- Best in class LED optic provides a comfortable, low glare direct and indirect light with asymmetric or symmetric distribution, sympathetic to users with a lower viewing angle
- Durable and vandal resistant (IK10 40 joules for the slim version)
- Bi power dimming and presence detection options reduce energy consumption
- Available in two sizes – slim and wide – with the wide version also suitable for use as street furniture



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

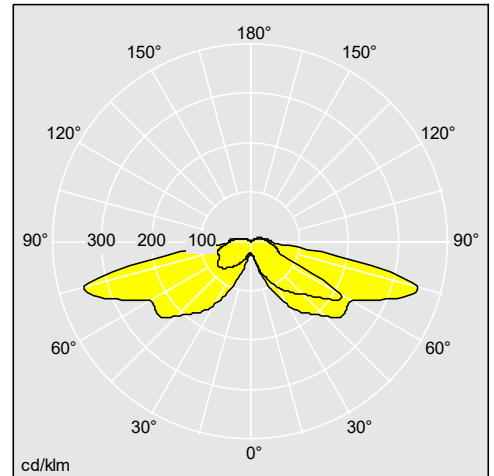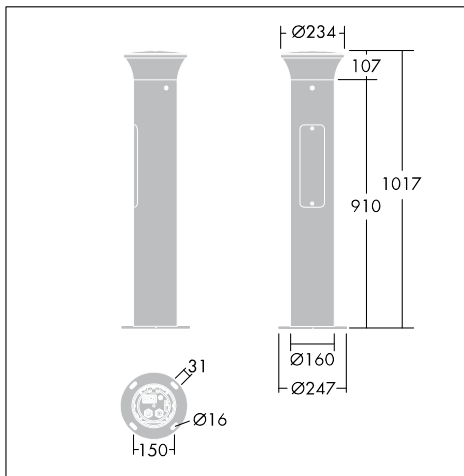

96264246

Material/Finish

Column and base: aluminium

Canopy: die-cast aluminium (EN AC 44300, standard corrosion class C5).

Diffuser: clear anti UV Polycarbonate

Reflector: white Polycarbonate

Gear Box: Polypropylene

Canopy and Column colour: powder coated dark grey (close to 7043)

Installation/Mounting

Slim version: suitable for Root and Flange mounting: 4 x anchor bolts M14 (96009822 to be ordered separately), spacing: 150mm.

Wide version: suitable for Flange mounting: 4 x anchor bolts M14 (to be ordered separately), spacing: 200mm.

Ready to install: prewired fittings to be connected with a connection box (to be ordered separately) through the anti vandal access door (via Torx hollow T30)

For RGB and Bi power versions choose the colour of the decorative led band or deactivate the Bi Power function at installation through the access door.

Gear box (including the driver) and head (including the LEDs) are easily replaceable as spares.

Specification

To specify state: Elegant and vandal resistant bollard offering asymmetric and symmetric distributions, combining both direct and indirect comfortable light, with decorative colour and dimming/presence detection.

As Thorn Thor Bollard.

Thor Bollard

Ordering Guide Supplied complete with LEDs.

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Thor Bollard Slim 250mA, Lit band, flange mounted				
TR B S 10L25 740 RGB R/S CL1 MPL	LED		7,664	96264229
TR B S 10L25 740 RGB ASY CL1 MPL	LED		7,664	96264230
TR B S 10L25 730 RGB R/S CL1 MPL	LED		7,664	96264231
TR B S 10L25 730 RGB ASY CL1 MPL	LED		7,664	96264232
Thor Bollard Slim 250mA, No lit band, flange mounted				
TR B S 10L25 740 R/S CL1 MPL	LED		7,664	96264225
TR B S 10L25 740 ASY CL1 MPL	LED		7,664	96264226
TR B S 10L25 730 R/S CL1 MPL	LED		7,664	96264227
TR B S 10L25 730 ASY CL1 MPL	LED		7,664	96264228
Thor Bollard Slim 250mA, Lit band, root mounted				
TR B S 10L25 740 RGB R/S CL1 MGR	LED		9,3	96264245
TR B S 10L25 740 RGB ASY CL1 MGR	LED		9,3	96264246
TR B S 10L25 730 RGB R/S CL1 MGR	LED		9,3	96264247
TR B S 10L25 730 RGB ASY CL1 MGR	LED		9,3	96264248
Thor Bollard Slim 250mA, No lit band, root mounted				
TR B S 10L25 740 R/S CL1 MGR	LED		9,3	96264241
TR B S 10L25 740 ASY CL1 MGR	LED		9,3	96264242
TR B S 10L25 730 R/S CL1 MGR	LED		9,3	96264243
TR B S 10L25 730 ASY CL1 MGR	LED		9,3	96264244
Thor Bollard Slim 350mA, Lit band, flange mounted				
TR B S 10L35 BPSW 740 RGB R/S CL1 MPL	LED		7,7	96273274
TR B S 10L35 BPSW 740 RGB ASY CL1 MPL	LED		7,7	96273275
TR B S 10L35 BPSW 730 RGB R/S CL1 MPL	LED		7,7	96273276
TR B S 10L35 BPSW 730 RGB ASY CL1 MPL	LED		7,7	96273277
Thor Bollard Slim 350mA, No lit band, flange mounted				
TR B S 10L35 BPSW 730 R/S CL1 MPL	LED		7,7	96273272
TR B S 10L35 BPSW 730 ASY CL1 MPL	LED		7,7	96273273
TR B S 10L35 BPSW 740 R/S CL1 MPL	LED		7,7	96273301
TR B S 10L35 BPSW 740 ASY CL1 MPL	LED		7,7	96273302
Thor Bollard Slim 350mA, Lit band, root mounted				
TR B S 10L35 BPSW 740 RGB R/S CL1 MGR	LED		9,3	96273290
TR B S 10L35 BPSW 740 RGB ASY CL1 MGR	LED		9,3	96273291
TR B S 10L35 BPSW 730 RGB R/S CL1 MGR	LED		9,3	96273292
TR B S 10L35 BPSW 730 RGB ASY CL1 MGR	LED		9,3	96273293
Thor Bollard Slim 350mA, No lit band, root mounted				
TR B S 10L35 BPSW 740 R/S CL1 MGR	LED		9,3	96273286
TR B S 10L35 BPSW 740 ASY CL1 MGR	LED		9,3	96273287

Thor Bollard

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
TR B S 10L35 BPSW 730 R/S CL1 MGR	LED		9,3	96273288
TR B S 10L35 BPSW 730 ASY CL1 MGR	LED		9,3	96273289
Thor Bollard Slim, Presence detection master, flange mounted				
TR B S 10L25 MAS 740 RGB ASY CL1 MPL	LED		7,9	96265400
TR B S 10L25 MAS 730 RGB R/S CL1 MPL	LED		7,9	96265401
TR B S 10L25 MAS 730 RGB ASY CL1 MPL	LED		7,9	96265402
TR B S 10L25 MAS 740 RGB R/S CL1 MPL	LED		7,9	96265399
TR B S 10L35 MAS 740 RGB R/S CL1 MPL	LED		7,7	96273306
TR B S 10L35 MAS 740 RGB ASY CL1 MPL	LED		7,7	96273307
TR B S 10L35 MAS 730 RGB R/S CL1 MPL	LED		7,7	96273308
TR B S 10L35 MAS 730 RGB ASY CL1 MPL	LED		7,7	96273309
Thor Bollard Slim, Presence detection master, root mounted				
TR B S 10L25 MAS 740 RGB R/S CL1 MGR	LED		9,5	96265407
TR B S 10L25 MAS 740 RGB ASY CL1 MGR	LED		9,5	96265408
TR B S 10L25 MAS 730 RGB R/S CL1 MGR	LED		9,5	96265409
TR B S 10L25 MAS 730 RGB ASY CL1 MGR	LED		9,5	96265410
TR B S 10L35 MAS 740 RGB R/S CL1 MGR	LED		9,3	96273312
TR B S 10L35 MAS 740 RGB ASY CL1 MGR	LED		9,3	96273313
TR B S 10L35 MAS 730 RGB R/S CL1 MGR	LED		9,3	96273314
TR B S 10L35 MAS 730 RGB ASY CL1 MGR	LED		9,3	96273315
Thor Bollard Slim, Presence detection slave, flange mounted				
TR B S 10L25 SLA 740 RGB R/S CL1 MPL	LED		7,7	96265415
TR B S 10L25 SLA 740 RGB ASY CL1 MPL	LED		7,7	96265416
TR B S 10L25 SLA 730 RGB R/S CL1 MPL	LED		7,7	96265417
TR B S 10L25 SLA 730 RGB ASY CL1 MPL	LED		7,7	96265418
TR B S 10L35 SLA 740 RGB R/S CL1 MPL	LED		7,7	96273324
TR B S 10L35 SLA 740 RGB ASY CL1 MPL	LED		7,7	96273325
TR B S 10L35 SLA 730 RGB R/S CL1 MPL	LED		7,7	96273326
TR B S 10L35 SLA 730 RGB ASY CL1 MPL	LED		7,7	96273327
Thor Bollard Slim, Presence detection slave, root mounted				
TR B S 10L25 SLA 740 RGB R/S CL1 MGR	LED		9,3	96265423
TR B S 10L25 SLA 740 RGB ASY CL1 MGR	LED		9,3	96265424
TR B S 10L25 SLA 730 RGB R/S CL1 MGR	LED		9,3	96265425
TR B S 10L25 SLA 730 RGB ASY CL1 MGR	LED		9,3	96265426
TR B S 10L35 SLA 740 RGB R/S CL1 MGRR	LED		9,3	96273329
TR B S 10L35 SLA 740 RGB ASY CL1 MGR	LED		9,3	96273330
TR B S 10L35 SLA 730 RGB R/S CL1 MGR	LED		9,3	96273331
TR B S 10L35 SLA 730 RGB ASY CL1 MGR	LED		9,3	96273332
Thor Bollard Wide, Lit band, flange mounted				
TR B W 10L25 740 RGB R/S CL1 MPL	LED		9	96264261
TR B W 10L25 740 RGB ASY CL1 MPL	LED		9	96264262
TR B W 10L25 730 RGB R/S CL1 MPL	LED		9	96264263

Thor Bollard

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
TR B W 10L25 730 RGB ASY CL1 MPL	LED		9	96264264
Thor Bollard Wide, No lit band, flange mounted				
TR B W 10L25 740 R/S CL1 MPL	LED		9	96264257
TR B W 10L25 740 ASY CL1 MPL	LED		9	96264258
TR B W 10L25 730 R/S CL1 MPL	LED		9	96264259
TR B W 10L25 730 ASY CL1 MPL	LED		9	96264260
Connection box, Slim version				
TEMPO16 CL2 4X16 1C/C			0,46	96012372
Connection box, Wide version				
CONNECT CABLE BOX 3/4x2,5² IP67			0,4	96257908
MGR base adaptors				
MGR SPIKE RAZE/DCO/THOR/CANDLE BOL			10	96635553
MGR BASE RAZE/DCO/THOR/CANDLE BOL			6	96635554