



Diffusalux

Curved profile linear luminaire with opal diffuser for surface mounting

- Curved opal diffuser in tough polycarbonate for specific light control
- Lumen output switch (LOS) for individual control of wattage/lumen output
- Lockable polycarbonate end caps
- Sealed to IP40



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

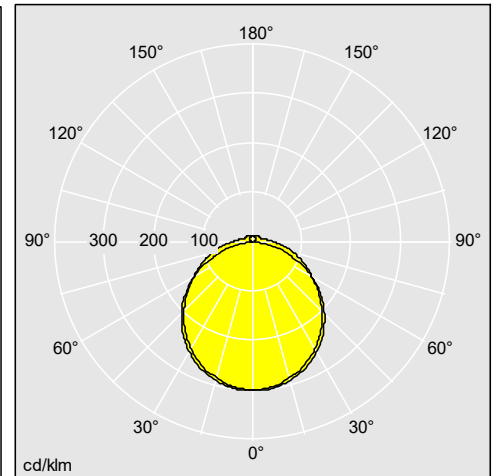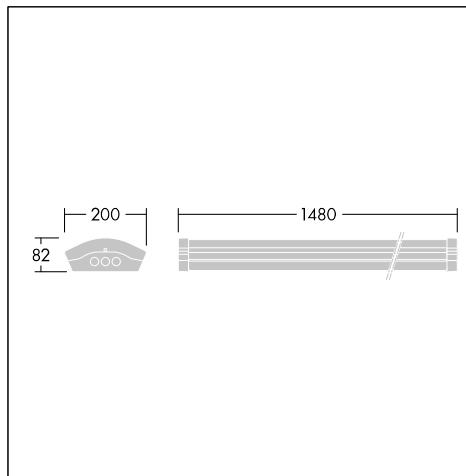

96633566

Material/Finish

Body and gear: white steel
End caps: polycarbonate

Diffuser: opal polycarbonate extrusion

Installation/Mounting

Cable entry in the centre of the back spine (Ø21,5mm)
Standard BESA fixings,
Piano key terminal block for easy installation.

Specification

To specify state:
Surface mounted, IP40 LED luminaire with curved polycarbonate diffuser retained along its length by screwed on end caps, dimmable.
As Thorn Diffusalux

Diffusalux

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Diffusalux				
DIFF 3 5000-840 HF L1500 LOS	LED		2,7	96633566
DIFF 3 5000-840 HF E3 L1500 LOS	LED		2,9	96633567
DIFF 3 5000-840 HF MWS L1500 LOS	LED		2,75	96633568
DIFF 3 5000-840 HF E3 MWS L1500 LOS	LED		2,95	96633569
DIFF 3 5000-840 HFIX L1500 LOS	LED		2,7	96633570
DIFF 3 5000-840 HFIX E3 L1500 LOS	LED		2,9	96633571
Accessory				
WIRE SUSPENSION KIT 1,5M			0,15	96204619