
Amazon

Striking luminaire for wall or ceiling mounting with encircled diffuser for directional halo effect

- · Sealed to IP65 with die-cast aluminium body for strength and rigidity
- Metallic bezel available in white, silver or anthracite
- Supplied with Quick Fix Bracket for safe and rapid electrical installation



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

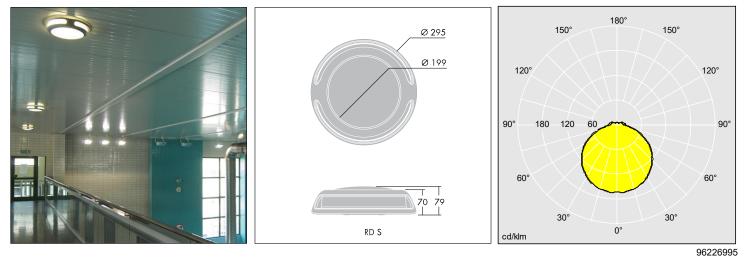

Material/Finish

Body: die-cast aluminium Bezel: die-cast aluminium, silver, anthracite, and white finish Diffuser: opal polycarbonate.

Installation/Mounting

Suitable for surface mounting on wall or ceiling for both interior and exterior use. Quick Fix Bracket is screw fixed onto mounting surface by 4 oblong holes (4.5mm x 10mm). Mains connection via 6x2x2.5mm² terminal block. 'Light Box' mechanically and electrically auto-connected to the Quick Fix Bracket. For loop wiring there are two Ø20mm cable entry holes on the Quick Fix Bracket.

Specification

To specify state:

Striking circular or square luminaire for 18/26W TC-DEL, 16/28/38W TC-DDEL compact fluorescent, 40/55W T16-R circular fluorescent lamps with die-cast aluminium 'floating halo' and double ring mounting and twin bridge with opal polycarbonate diffuser mounted to a die-cast aluminium body, with lamp and electronic, electronic dimmable, integral emergency gear connected to Quick Fix Bracket. As Thorn Amazon.

EN60598, TC-DDEL, IP65, IK09, Beam_Wall_6, Beam_eControl_A, SC1, Beam_Emergency, CE, RCM, T16-R, TC-SEL, TC-DEL, 960, Ta=25

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement. © Thorn Lighting