

## 92900134 FORCELED 4000 TW L840

|  |      |      |  |  |       |                           |
|--|------|------|--|--|-------|---------------------------|
|  | IP66 | IK10 |  |  | 850°C | T <sub>a</sub> -20<br>+35 |
|--|------|------|--|--|-------|---------------------------|

### ForceLED

A compact IP66, dust and moisture proof LED luminaire. electronic - fixed output fixed output control gear. Class I electrical, IK10. Canopy: fully recyclable aluminium painted white. Diffuser: polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Equipped with through wiring kit. Complete with 4000K LED.


Dimensions: 735 x 180 x 95 mm

Total power: 34 W

Weight: 3.04 kg



TLG\_FORL\_F\_PDBUNLIT.jpg

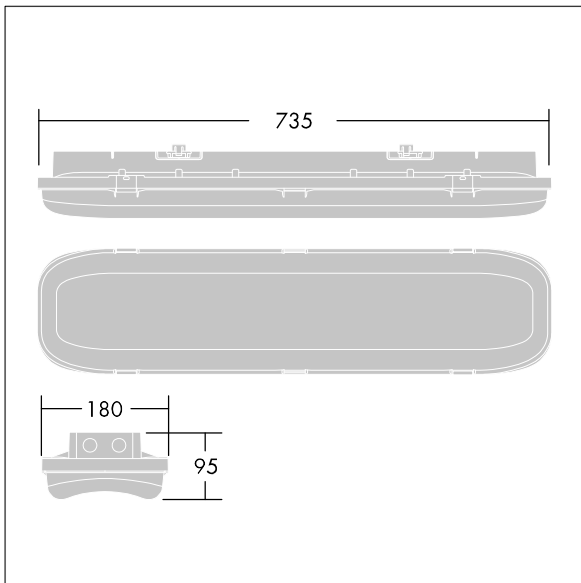

TLG\_FORL\_M\_LED.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Colour temperature is subject to a tolerance of up to  $\pm 150$  Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**ForceLED**

**92900134 FORCELED 4000 TW L840**

**THORN**