

GTLED

THORN

96209287 GTLED 30L70 741 S/S 1,5M

IP66   T_a50

GTLED


An advanced LED tunnel luminaire. Electronic, fixed output control gear. Body: extruded aluminium, powder coated white. To be surface mounted to ceiling or wall with optional bracket 96209279, special brackets available on request. Light distribution: Symmetrical. Supplied with 1.5m, 3 x 1.5mm², H07ZZ-F mains cable. Class I electrical, IP66. Complete with 4100K LED

Due to the unique calculation requirements of this product the photometric data is not provided here but design advice may be obtained from your local representative.

Dimensions: 1355 x 169 x 99 mm
Total power: 67 W
Weight: 12.5 kg



TLG_GTLD_F_P1LIT.jpg

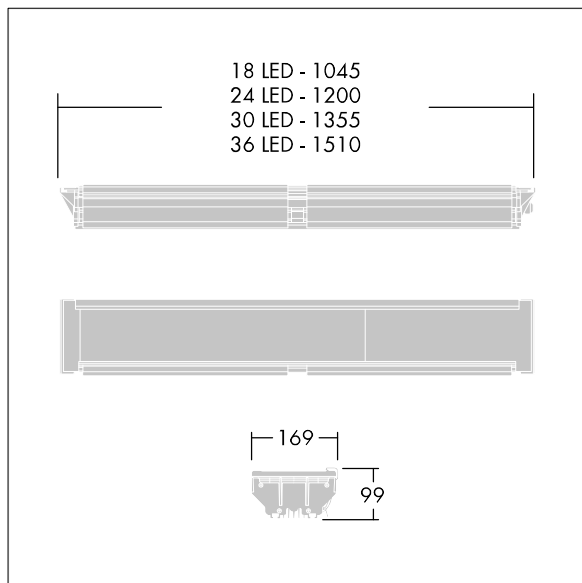

TLG_GTLD_M_LD2.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint. Unless otherwise stated all Thorn LED products are suitable for unrestricted use (rated RG0 or RG1) with regard photobiological blue light safety (IEC/EN60598-1).

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting